



Nonlinear FE Prediction of Shear Strength of RC T-Beams with Flange in Compression Zone

Osman M. O. Ramadan ^{a++}, Ahmed H. Abdel-Kareem ^{b++},
Hala R. Abousafa ^{b++} and Ibrahim A. El-Azab ^{b#*}

^a Department of Structural, Faculty of Engineering, Cairo University, Giza-12613, Egypt.

^b Department of Civil Engineering, Benha Faculty of Engineering, Benha University, Benha-13518, Qalyubia, Egypt.

Authors' contributions

This work was carried out in collaboration among all authors. All authors read and approved the final manuscript.

Article Information

DOI: 10.9734/JERR/2023/v24i7824

Open Peer Review History:

This journal follows the Advanced Open Peer Review policy. Identity of the Reviewers, Editor(s) and additional Reviewers, peer review comments, different versions of the manuscript, comments of the editors, etc are available here: <https://www.sdiarticle5.com/review-history/97036>

Original Research Article

Received: 01/01/2023

Accepted: 03/03/2023

Published: 09/03/2023

ABSTRACT

This research predicts the shear strength of reinforced concrete T-beams with flanges under compression stresses using nonlinear finite element (FE) analysis. A FE model is developed and verified against specially designed experiments (beams with varying flange width and depth). Results of the FE models were found to be in excellent agreement with their corresponding experimental results. The average load capacity and deflections (FE/experiments) ratios were 1.03 and 0.87, respectively. We then conducted an extensive parametric study to investigate the structural performance of flanged beams under the effect of two concentrated point loads. This parametric study examined four parameters: flange dimensions, longitudinal reinforcement in flange, concrete compressive strength, and shear span to depth ratio. Our findings indicated that

⁺⁺ Professor;

[#] Lecturer, Ph.D.;

*Corresponding author: Email: Ibrahim.Elazab@bhit.bu.edu.eg;

the presence of compressed flanges in T-beams increases the shear strength by up to 260% of the shear strength of the web alone. The shear strength of flanged beams increases with the increase in flange dimensions, where the effect of flange thickness is more pronounced than that of flange width. Moreover, the presence of longitudinal reinforcement in the flange enhanced the beam's shear strength by up to 40%, compared to similar beams without flange reinforcement. Additionally, the shear strength increased up to three-fold for various beam conditions when the shear span to depth ratio was reduced from 2.0 to 0.5. These findings provide valuable insights for designing and constructing reinforced concrete T-beams with flanges under compression stresses.

Keywords: Finite element analysis; shear strength; reinforced concrete beams; T-beam; Girder.

1. INTRODUCTION

Flanged reinforced concrete beams have been widely used in many applications in the field of civil engineering. As such, the performance of these structural members was discussed experimentally as well as analytically. Hesham et al. [1] conducted a numerical experimental study the shear behavior of lightweight concrete flanged beams. Six lightweight concrete beams were tested to investigate the effects of flange width and shear span to depth ratio. Their experimental and FE results showed that the failure load of T-beams with different flange widths (320, 520, and 720 mm) increased in proportion to the flange width. However, it was also observed that the failure load was inversely proportional to all the shear span to depth ratio.

Balamuralikrishnan et al. [2] performed experiments as well as FE investigations to evaluate the performance of RC T-beams reinforced internally with GFRP reinforcements to shearing loads. A total of twelve specimens were tested with varying parameters (type of reinforcements, reinforcements ratio, and concrete grade). Finite element modeling of the T-beams was done using ANSYS program utilizing two special elements: solid 65 and link 8. The experimental outcomes of the flanged beams agreed well with the FE numerical results.

Hamdy et al. [3] showed that finite element modeling via ANSYS program was able to fairly predict the performance of RC T-beams with openings reinforced with either carbon fiber reinforced polymer (CFRP) or basalt fiber reinforced polymer (BFRP) sheets. In particular, ANSYS finite element models could reasonably predict the failure load and the mode of failure for the analyzed beams.

Hugo et al. [4] pointed out that the serviceability circumstances of T-beams can be improved by increasing the concrete strengths as concrete

strength has an essential influence on the debonding phenomenon.

Pansuk et al. [5] indicated that an increase in the flange width of a T-beam gave higher shear capacity (in a nonlinear relationship) for the T-beams with shear reinforcement. However, they found that in the case of a T-beam without shear reinforcement, the width of the flange has almost no effect on shear capacity.

Sato et al. [6] showed that concrete top flanges had significant effects on shear behavior of RC T-beams as it affects the shear strength, stress in shear reinforcement, and crack propagation. Concrete top flanges could also reduce the shear strains in the beam web. They recommended that concrete top flange near compression zone should be considered as part of the shear resisting mechanism of T-beams.

Finally, Giaccio et al. [7] tested fifteen flanged specimens with shear reinforcement and web longitudinal reinforcement. There observed the effect of the flange width to web width ratio (b_f/b_w) on the shear strength of reinforced concrete T-beams; this effect depended on the ratio of flange thickness to effective beam depth (d_f/d_o). They suggested based on their experiments that as long as the ratio d_f/d_o is above a certain minimum value ($d_f/d_o \geq 0.25$), then the increase in shear resistance for a given increase in b_f/b_w is independent of d_f/d_o .

Numerical analysis technique that is based on the finite element method has been checked in this research to detect the effect of the flange on the reinforced concrete T-beams in both pre- and post-cracking stages of loading and up to ultimate load. ANSYS [8] is adopted in the study as it is furnished with sufficient modelling features that suit the finite element analysis of RC beams. First, 3-D nonlinear FE models of flanged beams "**with flange in the compression**" were specially developed using

ANSYS V-19.2. Then, results obtained were validated through comparisons with the test results of specially designed and conducted experiments that included similar beams. Results of the FE models agreed very well with the corresponding experimental results; the theoretical and experimental crack patterns were also in good practical agreement. Using this validated model, it was possible to run an extensive parametric study of all variables, a study that couldn't be done experimentally due to cost and time constraints.

2. FINITE ELEMENT MODELING USING ANSYS

2.1 Geometry

Finite element modeling and nonlinear analysis are performed using ANSYS software. The structural element types adopted for geometric idealization of the different materials are SOLID 65 for concrete, and LINK 8 for steel bars and stirrups. In order to avoid stress concentration problems such as localized crushing of concrete

elements near the bearing and loading plates, SOLID 45 elements are used to model the 30 mm thickness steel plates inserted at locations of supports and concentrated loads (see Fig. 1 for modelling layout). For solving the nonlinear equations using Newton- Raphson equilibrium iteration technique, the infinite norm of displacement and the convergence precision are taken equal to 0.05 [9,10,11]. Fig. 2 shows the loading configuration and support conditions.

2.2 Constitutive Relations

Constitutive relationships for both the reinforcement and the concrete are described below.

2.2.1 Constitutive relation for concrete

Concrete is a quasi-brittle material that behaves differently in compression and tension. The tensile strength of concrete is typically 8-15% of its compressive strength [12]. Fig. 3 shows a typical stress-strain curve for normal weight concrete applied in our numerical study [13].

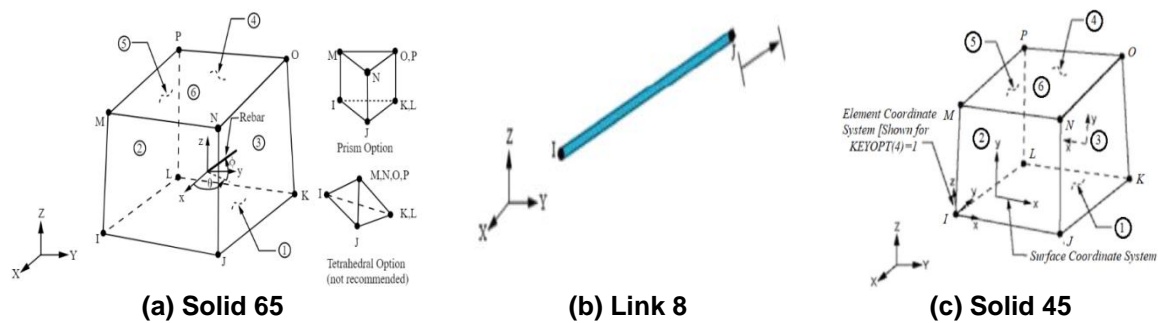


Fig. 1. Structural elements idealization for the numerical models [9]

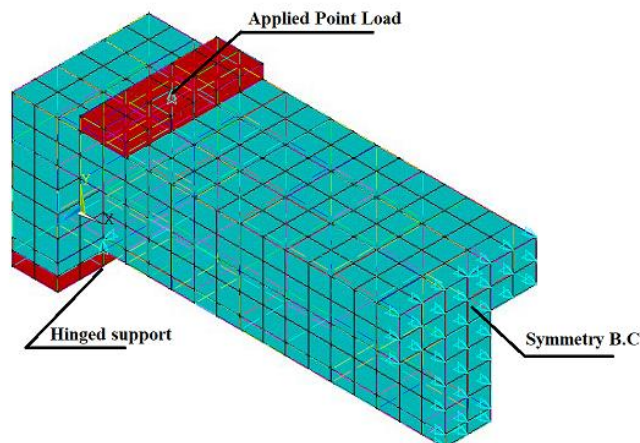


Fig. 2. Applied load and support conditions

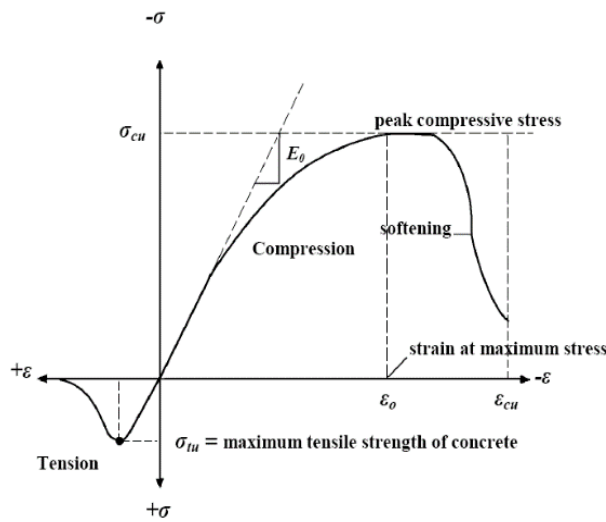


Fig. 3. Typical uniaxial compressive and tensile stress-strain curve for concrete (Bangash1989)

To define concrete material in ANSYS, the following inputs are required: elastic modulus (E_c); ultimate uniaxial compressive strength (f'_c); ultimate uniaxial tensile strength (modulus of rupture, f_t); Poisson's ratio (ν); and shear transfer coefficient (β_t). To define the uniaxial stress-strain relationship for concrete in compression, Eqs. 1 to 3 were used [14].

Where:

f = stress at any strain ϵ , psi

ϵ = strain at stress f

ϵ_0 = strain at the ultimate compressive strength

f'_c

E_c = the initial tangent modulus for concrete in MPa and is defined according to ACI-318 14 [15] by the following equations:

$$f = \frac{E_c \epsilon}{1 + \left(\frac{\epsilon}{\epsilon_0}\right)^2} \quad (1)$$

$$\epsilon_0 = \frac{2f'_c}{E_c} \quad (2)$$

$$E_c = \frac{f}{\epsilon} \quad (3)$$

$$E_c = 4700 \sqrt{f'_c} \quad (4)$$

Fig. 4 shows the simplified compressive uniaxial stress-strain relationship adopted in this study.

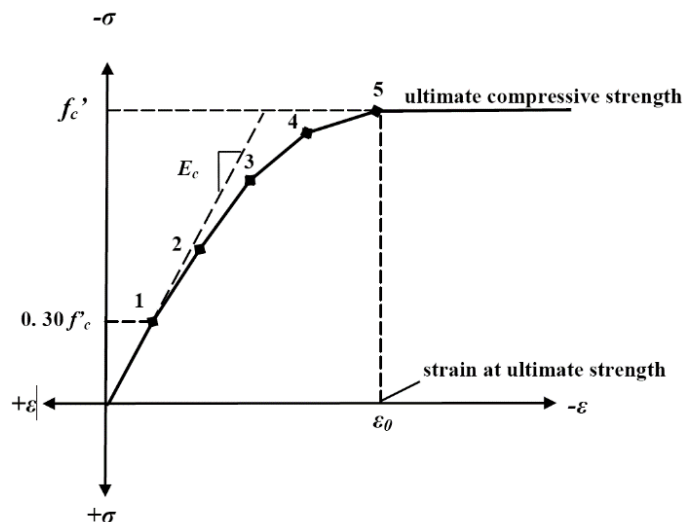


Fig. 4. Simplified compressive uniaxial stress-strain curve for concrete

2.2.2 Constitutive relation for steel

Fig. 5 shows the idealized stress-strain relationship for the steel reinforcement. Material properties are as follows: elastic modulus, $E_s=200,000$ MPa; yield stress, $f_y = 420$ MPa (Lab test); and Poisson's ratio, $\nu = 0.3$.

3. MODEL VALIDATION

In this section, results of the FE model are validated using test results of a recent experimental investigation conducted by the authors [16]. Table 1 presents the geometrical and mechanical properties of few selected specimens for comparison. Furthermore, the test set-up together with specimens' details are shown in Figs. 6 and 7, respectively, while the corresponding finite element models are shown

in Fig. 8. For details about the full experimental program to nineteen specimens, please refer to [16].

3.1 Load Deflection Curves

Fig. 9 compares the load-deflection calculated using ANSYS models with the corresponding experimental measurements for three specimens (C0, G1-0.3-3 & G3-0.5-5). It is seen that the FE results agree very well with the experiments [16] in terms of the ultimate load capacity (P_u) and the corresponding ultimate deflection (Δ_u). It is noted, however, that- in the initial part- the theoretical load-deflection curve is 9% to 15% stiffer than that obtained experimentally. Besides, the average ratio of FE to experimental ultimate deflections [$\Delta_{u(FE)} / \Delta_{u(EXP)}$] for all specimens was 0.87 [16].

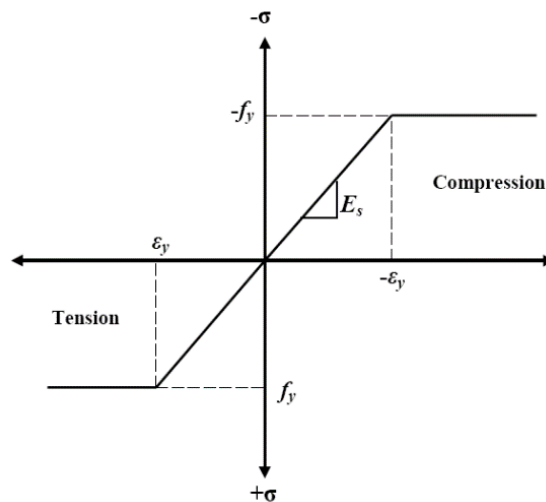
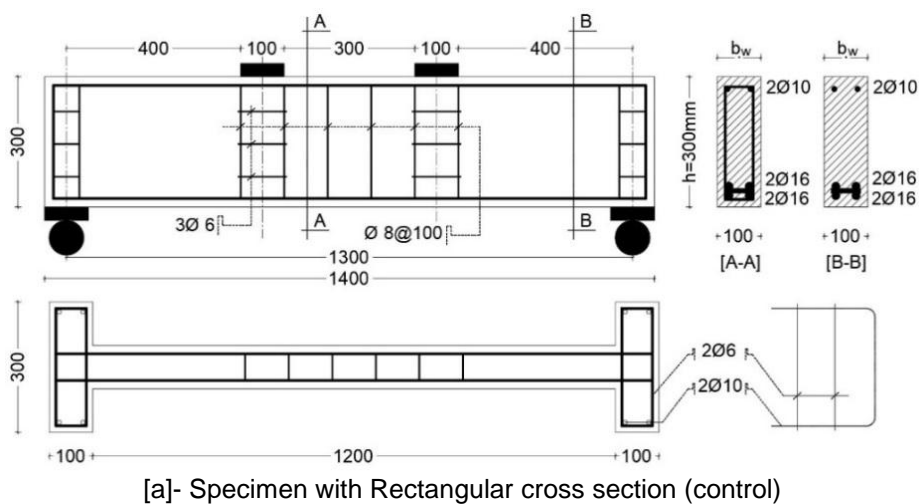


Fig. 5. Idealized stress-strain curve for reinforcing steel



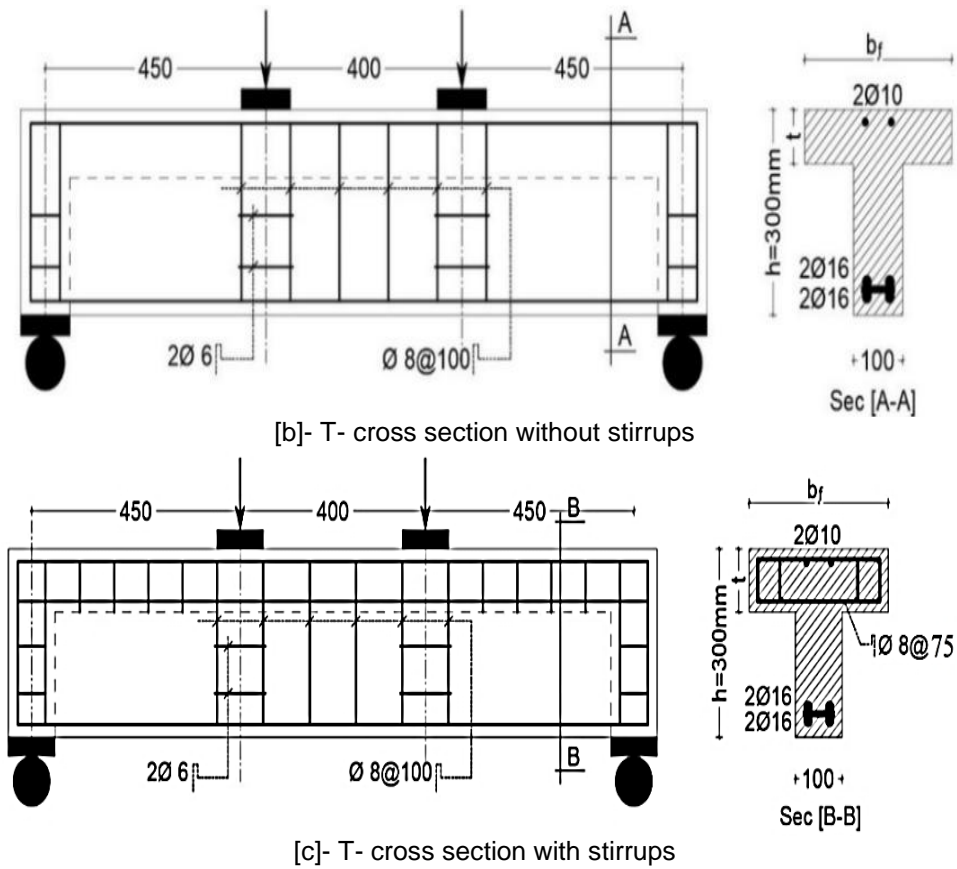


Fig. 6. Specimen details and arrangement of reinforcement (All dimensions in mm) [16]

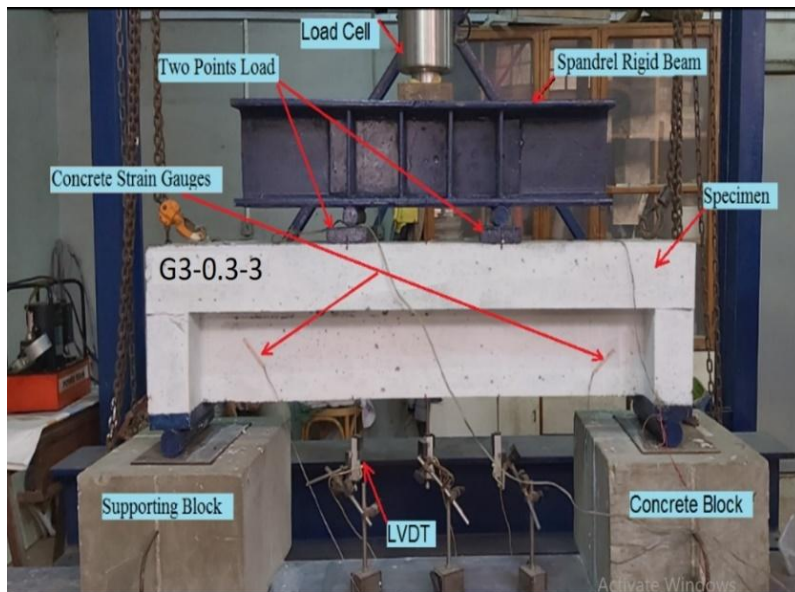


Fig. 7. Preparation of Test Set-up Specimens [16]

Table 1. Experimental program

Specimen	Cross Sectional Area (cm ²)	Cross Sectional Area Increasing (%)	Flange Dim.			Stirrups in flange within shear zone (mm)	Longitudinal reinforcement in Flange		Longitudinal reinforcement in Flange [%]
			t_f (cm)	b_f (cm)	A_f (cm ²)		Bottom Steel	Top Steel	
C0	300	-----	-----			-----	-----	-----	
G1-0.3-3	480	60%	0.3h= 9	30	270	-----	-----	-----	
G3-0.5-5	900	200%	0.5h=15	50	750	Ø8@75	6 Ø 10 + 1Ø10/side	2 Ø 8 + 2 Ø 6	1.046%

For specimens G1-0.3-3 and G3-0.5-5: the first part G1 refers to without flange reinforcement while G3 with longitudinal bars and flange stirrups within the shear zones; the second part refers to the ratio of flange thickness to the total depth ($\rho_t = 0.3$ and 0.5); and the third part refers to the flange width to web width ratio ($\rho_b = 3$ and 5)

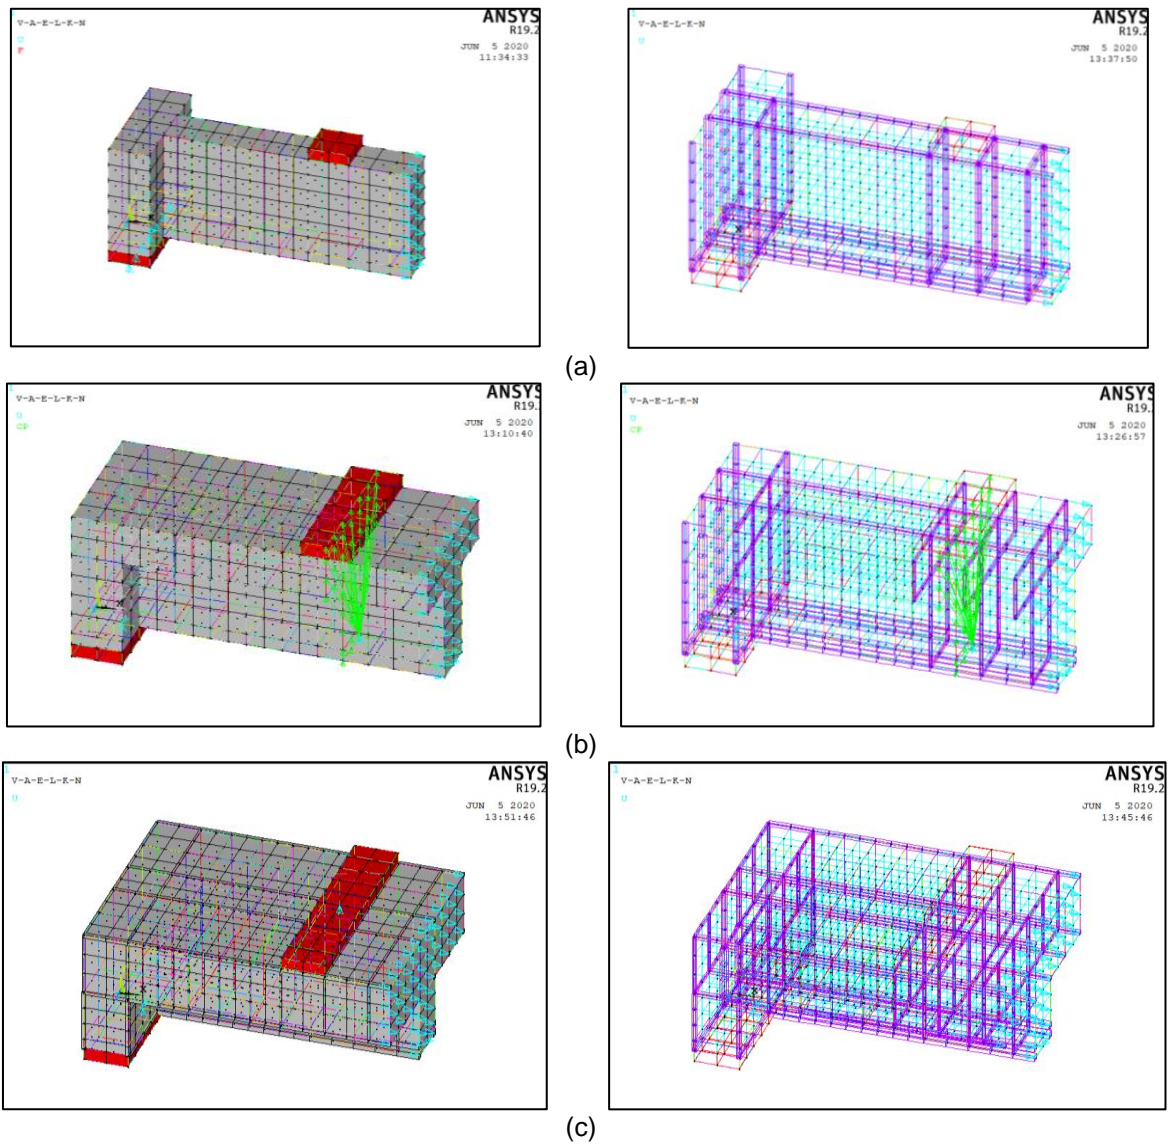


Fig. 8. Finite Element Simulation Models for specimens: a) Rectangular; b) G1-0.3-3; and c) G3-0.5-5 from Ref. [16]

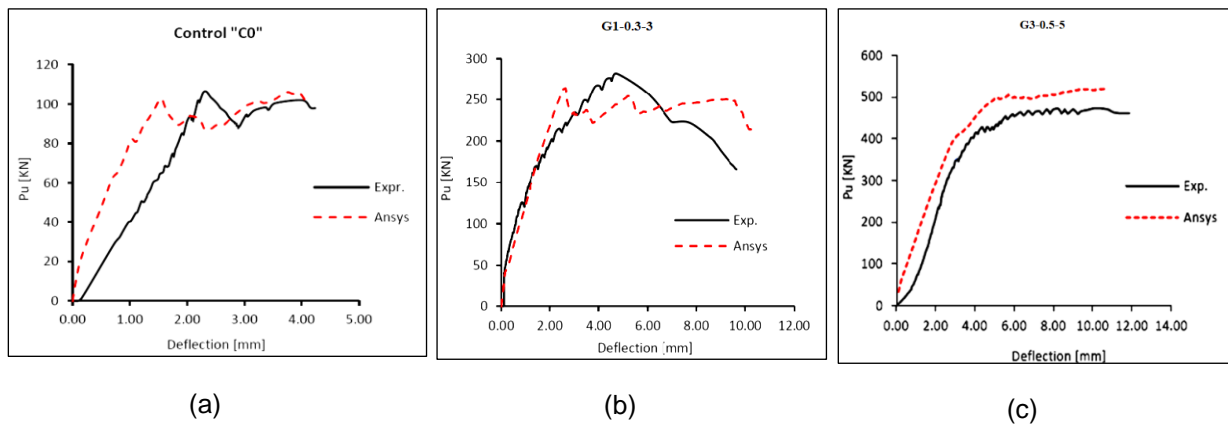


Fig. 9. Predicted and Measured Load-Deflections Curves for Three Specimens: a) Rectangular; b) G1-0.3-3; and c) G3-0.5-5. [16]

3.2 Ultimate Load Comparison

The experimental ultimate loads for specimens C0, G1-0.3-3, and G3-0.5-5 were 106.4, 281.9, and 473.8 kN; respectively; while its FE predictions were 113.4, 264.1, and 516.2 kN; respectively. The difference between the theoretical and experimental ultimate loads is about $\pm 6\%$, while the average of the $[P_{u(FE)} / P_{u(EXP)}]$ ratio for all specimens is 1.03. This validates accuracy of the ANSYS model and qualifies it for use in the parametric study to examine the performance of reinforced concrete T-beams.

3.3 Crack Pattern and Failure Mode

A comparison between the experimental crack patterns for tested beams in Ref. [16] with the predicted crack patterns by ANSYS is shown in Fig. 10. All specimens failed in shear (mode)

distinguished by wide diagonal cracks extending from close to the supporting column towards the steel loading plate. In addition, the figure shows change in spreading of cracks with the presence and size of flange.

3.4 Parametric Study

3.4.1 General

In order to study the effect of different parameters on the structural response of RC T-beams, several beams (labeled as S, S1, S2, ... S96) are analyzed. As given in Table 2, the main considered parameters include: (1) the concrete strength (f_c'), (2) width ratio (ρ_b), (3) depth ratio (ρ_d), (4) ratio of longitudinal steel in flange (ρ), and (5) shear span to depth ratio (a/d). The rectangular beam S is the reference or control case.

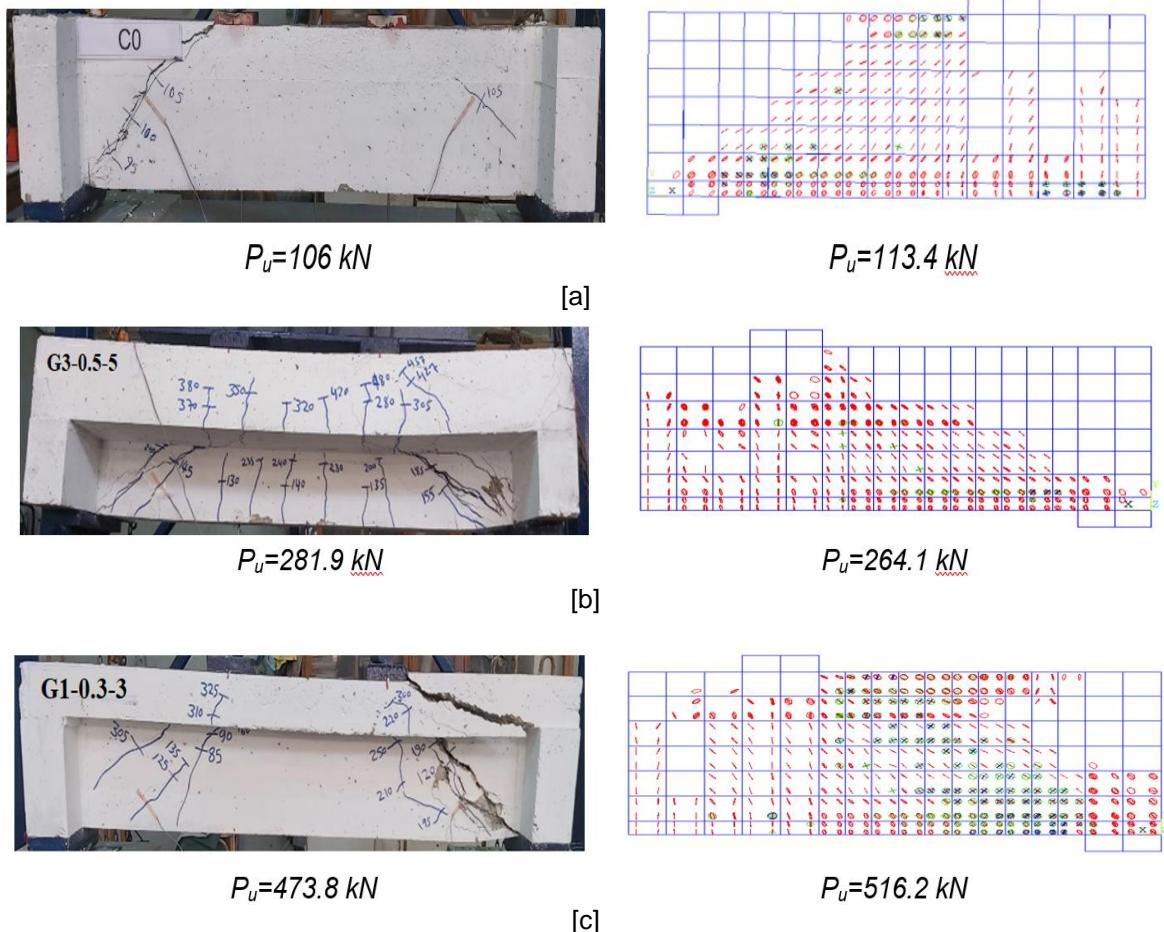


Fig. 10. Predicted and Observed Cracking Patterns and Failure Load for Three Specimens: a) Rectangular; b) G1-0.3s-3; and c) G3-0.5-5 [16]

Table 2. Parametric study

Specimen	width ratio	Depth ratio	a/d	f _c	Longitudinal steel in flange	No of Runs
	(ρ _b)	(ρ _t)			ρ %	
S	-----	-----	2.0	30	-----	1
S 1:12	3	0.10, 0.3, 0.5& 0.7	0.5, 1.0, and 2.0	30	0.5	12
S 13:24	5	0.10, 0.3, 0.5& 0.7	0.5, 1.0, and 2.0	30	0.5	12
S 25:48	7	0.10, 0.3, 0.5& 0.7	0.5, 1.0, and 2.0	30 and 60	0.5	24
S 49:84	7	0.10, 0.3, 0.5& 0.7	0.5, 1.0, and 2.0	30	0.0, 1.0, and 2.0	36
S 85:96	9	0.10, 0.3, 0.5& 0.7	0.5, 1.0, and 2.0	30	0.5	12
Total						97

Width ratio (ρ_b = b_f/b_w) is the ratio of flange width “b_f” and web width “b_w”, depth ratio (ρ_t = t/h) is the ratio of flange thickness “t” and total web depth “h”, a/d is the span to depth ratio, ρ % is the longitudinal steel in the flange. Control specimen S is rectangular section, with total depth 300 mm and width 100 mm

Note: In every row of Table 2, as the beam label increases (from S_i to S_{i+1}, S_{i+2}, etc.) changes in parameters occur first for ρ_t, then for a/d, then for f_c, and finally for ρ, as listed in the table. Thus, S49 designates the beam with ρ_t = 0.1, a/d = 0.5, and ρ = 0.0, while S54 represents the beam with ρ_t = 0.3, a/d = 1.0, and ρ = 0.0, and S79 is the beam with ρ_t = 0.5, a/d = 1.0, and ρ = 2.0.

3.5 Presentation of ANSYS Results

The following terms were used to present the results and all specimens' results are displayed in Table 3.

- Loads at the yield level (P_y) and at the ultimate level (P_u).
- Deflection at the yield level (Δ_y) and at the ultimate level (Δ_u).
- Displacement ductility (μ_Δ) = (Δ_u/Δ_y).
- Toughness (I) = the area under the load-deflection curve.

Table 3. Numerical results for various analyzed beams

Specimen	P _u (kN)	P _y (kN)	P _{cr} (kN)	Δ _u (mm)	Δ _y (mm)	Δ _{cr} (mm)	Q _{UR}	α _{UR}	I	I _{UR}
S	141.61	-----	33.47	2.81	-----	0.34	1	1	1089	1.0
S1	559.50	356.40	140.44	2.86	3.03	0.36	3.95	1.02	2907	2.7
S2	516.96	437.77	142.56	2.04	2.51	0.33	3.65	0.73	3846	3.5
S3	692.85	430.30	150.87	2.91	3.18	0.38	4.89	1.04	3673	3.4
S4	714.67	N.Y*	178.62	2.43	N.Y*	0.38	5.05	0.86	4364	4.0
S5	300.22	210.57	72.36	2.53	2.82	0.38	2.12	0.90	1717	1.6
S6	328.58	271.78	72.66	2.67	3.53	0.33	2.32	0.95	2715	2.5
S7	440.19	427.09	73.28	3.92	4.21	0.34	3.11	1.40	3104	2.9
S8	500.99	N.Y	86.67	3.65	N.Y	0.33	3.54	1.30	3119	2.9
S9	156.09	100.52	38.30	2.69	7.35	0.32	1.10	0.96	1022	0.9
S10	198.57	147.53	35.73	3.57	5.05	0.27	1.40	1.27	1446	1.3
S11	270.99	195.03	37.47	4.50	5.37	0.27	1.91	1.60	1674	1.5
S12	354.17	N.Y	45.78	5.13	N.Y	0.29	2.50	1.83	2127	2.0
S13	572.64	560.06	148.62	2.54	2.56	0.38	4.04	0.90	3088	2.8
S14	623.87	621.41	157.71	2.93	2.90	0.37	4.41	1.04	4861	4.5
S15	769.96	756.27	168.70	2.75	3.50	0.40	5.44	0.98	6633	6.1
S16	882.42	N.Y	218.41	2.86	N.Y	0.34	6.23	1.02	6909	6.3
S17	284.25	193.88	71.34	2.35	4.11	0.33	2.01	0.84	1883	1.7
S18	361.60	282.53	73.14	2.70	3.72	0.32	2.55	0.96	2871	2.6
S19	520.52	492.87	80.92	4.67	5.07	0.33	3.68	1.66	4373	4.0
S20	651.44	N.Y	110.52	4.23	N.Y	0.33	4.60	1.51	4493	4.1
S21	155.06	98.58	34.58	4.24	6.02	0.23	1.09	1.51	1087	1.0
S22	205.31	172.54	38.04	3.23	6.78	0.30	1.45	1.15	1540	1.4
S23	291.47	253.38	43.59	4.14	5.38	0.23	2.06	1.47	2194	2.0
S24	437.37	422.75	59.74	5.62	5.01	0.29	3.09	2.00	3605	3.3
S25	539.03	450.27	147.13	2.50	1.55	0.36	3.81	0.89	4428	4.1
S26	601.13	555.55	155.19	2.03	2.28	0.36	4.24	0.72	5587	5.1

Specimen	P_u (kN)	P_v (kN)	P_{cr} (kN)	Δ_u (mm)	Δ_v (mm)	Δ_{cr} (mm)	Q_{UR}	α_{UR}	I	I_{UR}
S27	813.05	598.64	186.74	2.41	4.57	0.37	5.74	0.86	6426	5.9
S28	955.33	N.Y	266.28	2.51	N.Y	0.35	6.75	0.89	6911	6.3
S29	291.17	206.89	75.67	2.16	3.73	0.32	2.06	0.77	2055	1.9
S30	370.20	340.28	76.91	2.53	4.11	0.31	2.61	0.90	3413	3.1
S31	583.19	432.66	89.37	3.64	4.33	0.31	4.12	1.29	4434	4.1
S32	683.84	N.Y	140.99	3.85	N.Y	0.33	4.97	1.37	5042	4.6
S33	155.33	142.38	40.71	2.58	5.27	0.28	1.10	0.92	1172	1.1
S34	216.92	162.65	43.43	3.07	6.90	0.23	1.53	1.09	1683	1.5
S35	345.30	N.Y	48.58	4.41	N.Y	0.26	2.44	1.57	2678	2.5
S36	468.64	N.Y	73.43	4.76	N.Y	0.28	3.31	1.69	3403	3.1
S37	966.03	780.48	184.95	3.21	3.44	0.29	6.82	1.14	8841	8.1
S38	1160.45	1091.52	190.97	4.03	3.66	0.30	8.19	1.43	10419	9.6
S39	1616.71	1488.36	225.87	11.42	5.14	0.33	11.42	4.06	16049	14.7
S40	1575.32	1409.87	337.32	4.47	8.56	0.33	11.12	1.59	12934	11.9
S41	537.98	457.99	88.35	3.81	5.05	0.33	3.80	1.35	4829	4.4
S42	729.11	674.25	94.84	15.30	7.70	0.31	5.15	5.44	9242	8.5
S43	899.35	830.58	113.21	17.34	6.49	0.31	6.35	6.17	13217	12.1
S44	1089.80	1010.36	178.46	12.49	5.27	0.33	7.70	4.44	14311	13.1
S45	291.42	258.80	43.89	5.41	7.07	0.27	2.06	1.93	2239	2.1
S46	387.44	362.88	46.12	11.57	6.76	0.26	2.74	4.12	3544	3.3
S47	471.56	420.76	57.63	11.46	5.11	0.26	3.33	4.08	4526	4.2
S48	594.53	515.21	93.98	12.00	4.23	0.28	4.20	4.27	5637	5.2
S49	552.96	N.Y	141.13	2.34	N.Y	0.33	3.90	0.83	4069	3.7
S50	618.56		155.58	2.23		0.29	4.37	0.80	5694	5.2
S51	772.52		157.25	2.73		0.25	5.46	0.97	5932	5.4
S52	831.80		184.54	2.95		0.24	5.87	1.05	7118	6.5
S53	305.85		102.28	2.40		0.60	2.16	0.85	2832	2.6
S54	340.13		76.79	2.35		0.31	2.40	0.84	1628	1.5
S55	456.24		87.24	3.21		0.30	3.22	1.14	3252	3.0
S56	648.25		135.01	5.25		0.35	4.58	1.87	5316	4.9
S57	161.20		37.59	2.66		0.27	1.14	0.95	1086	1.0
S58	229.81		39.64	3.93		0.27	1.62	1.40	1591	1.5
S59	310.08		46.74	5.56		0.27	2.19	1.98	2277	2.1
S60	336.09		65.19	6.74		0.26	2.37	2.40	3019	2.8
S61	545.20	435.37	146.33	2.21	9.09	0.36	3.85	0.79	4563	4.2
S62	673.43	N.Y	159.83	2.25	N.Y	0.39	4.76	0.80	5696	5.2
S63	839.89		188.97	2.51		0.33	5.93	0.89	6190	5.7
S64	972.73		254.32	2.45		0.31	6.94	0.87	8186	7.5
S65	319.21	216.90	78.21	2.47	9.33	0.37	2.25	0.88	2430	2.2
S66	418.11	N.Y	83.40	3.02	N.Y	0.37	2.95	1.07	3392	3.1
S67	610.65		91.59	4.44		0.30	4.31	1.58	5294	4.9
S68	703.74		151.69	3.51		0.34	4.83	1.25	5627	5.2
S69	155.78		40.91	2.50		0.28	1.10	0.89	1139	1.0
S70	246.86		38.21	3.84		0.25	1.74	1.37	2008	1.8
S71	433.35		49.18	6.42		0.26	3.06	2.28	3222	3.0
S72	460.77		82.91	4.61		0.30	3.25	1.64	3440	3.2
S73	564.70		147.63	2.55		0.36	3.99	0.91	4697	4.3
S74	744.36		153.98	2.94		0.31	5.26	1.05	5158	4.7
S75	853.55		196.26	2.37		0.32	6.03	0.84	6025	5.5
S76	982.97		295.72	4.54		0.35	6.87	1.62	8148	7.5
S77	325.30		72.43	2.63		0.32	2.30	0.94	2289	2.1
S78	396.49		77.21	2.70		0.31	2.80	0.96	3879	3.6
S79	574.60		99.76	3.09		0.32	4.06	1.10	4708	4.3
S80	690.89		160.98	3.47		0.34	4.88	1.24	5451	5.0
S81	169.86		38.23	3.02		0.27	1.20	1.07	1317	1.2
S82	260.72		39.36	4.61		0.27	1.84	1.64	2169	2.0
S83	401.81		51.43	4.20		0.26	2.84	1.50	2647	2.4
S84	473.23		87.67	4.94		0.29	3.34	1.76	3589	3.3
S85	552.58		143.38	2.30		0.32	3.90	0.82	3252	3.0
S86	657.33		159.68	6.30		0.29	4.64	2.24	5226	4.8
S87	855.04		211.25	5.43		0.36	6.04	1.93	4052	3.7
S88	1091.01		262.26	3.22		0.29	7.70	1.15	4738	4.4

Specimen	P_u (kN)	P_y (kN)	P_{cr} (kN)	Δ_u (mm)	Δ_y (mm)	Δ_{cr} (mm)	Q_{UR}	α_{UR}	I	I_{UR}
S89	307.32	192.59	76.99	2.40	4.66	0.3217	2.17	0.85	2017	1.9
S90	406.85	381.67	84.37	2.75	4.01	0.31	2.87	0.98	3574	3.3
S91	613.52	462.25	102.29	3.70	4.40	0.32	4.33	1.32	4266	3.9
S92	690.99	N.Y	164.68	3.37	N.Y	0.33	4.88	1.20	6088	5.6
S93	159.26	129.55	37.48	2.73	7.28	0.27	1.12	0.97	1203	1.1
S94	247.99	192.69	41.81	3.78	6.50	0.27	1.75	1.34	1920	1.8
S95	389.48	302.82	53.68	5.79	8.00	0.26	2.75	2.06	2914	2.7
S96	512.85	N.Y	85.62	5.08	N.Y	0.28	3.62	1.81	2074	1.9

*: The longitudinal steel in flange Did Not Yield

Where:

$$Q_{UR} = \text{Shear capacity ratio at the ultimate load level} = P_u / P_{ur} \quad (5)$$

$$\alpha_{UR} = \text{Deflection ratio at the ultimate load level} = \Delta_u / \Delta_{ur} \quad (7)$$

$$I_{UR} = \text{Toughness ratio} = I / I_{ur} \quad (8)$$

And

P_{cr} : Cracked load (kN).

Δ_{cr} : The deflection at the first crack (mm).

P_{ur} : Shear capacity at the ultimate load level for the control specimen (S).

Δ_{ur} : Deflection at the ultimate level for the control specimen.

I_{ur} : Toughness of the control specimen.

3.6 Effect of Flange Dimensions: Width Ratio ($\rho_b = b_f/b_w$) and Depth Ratio ($\rho_f = t/h$)

Fig. 11 presents the variation of beam ultimate shear strength, P_u , with the flange width ratio (ρ_b) for T-beams with variable flange thickness ratio (ρ_f). In addition, Fig. 12 presents the variation of beam ultimate shear strength, P_u , with the flange thickness ratio (ρ_f) for T-beams with variable

flange width ratio (ρ_b). The data in Figs. 11 and 12 corresponds to beams with $\rho = 0.5$, $f_c' = 30$, and $a/h = 2$. Compared to control beam S (with $P_u = 141.61$ kN), presence of flange with a width of triple times web width ($\rho_b = 3$) and with thickness of 0.1, 0.3, 0.5, and 0.7 of beam depth; increased beam shear strength P_u by 10%, 40%, 90%, and 150%; respectively. Besides, for flange width of nine times web width ($\rho_b = 9$), the corresponding increases in beam shear strength become 12%, 75%, 175%, and 260%; respectively. Both flange width and thickness affect the shear strength of T-beams while the effect of flange thickness is more pronounced. For thin flanges ($\rho_f = 0.10$), increasing flange width does not help.

3.7 Effect of Longitudinal Steel in Flange

The ultimate load predicted for T-beams with variable flange longitudinal reinforcement percentile ratios (0, 0.5, 1.0, and 2) is shown in Fig. 13 for three cases of shear span to depth ratio ($a/h = 0.5, 1.0, \text{ and } 2.0$). Fig. 13 shows that increasing flange longitudinal reinforcement, ρ , from 0% to 2% increases the beam ultimate load by an average of 8%, 29%, and 27% for $a/h = 0.5, 1.0, \text{ and } 2$; respectively.

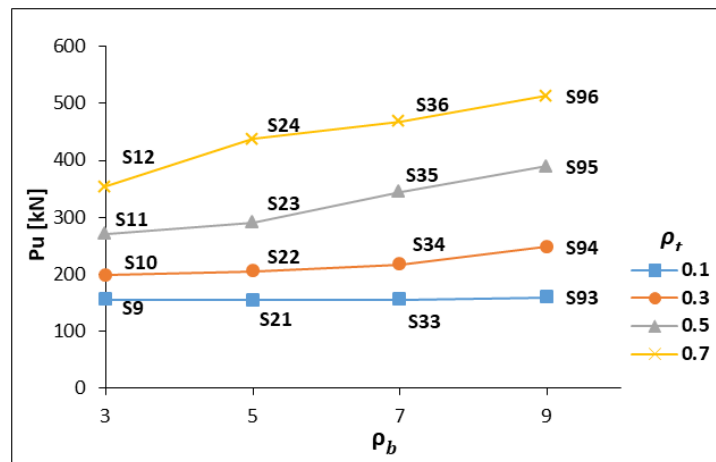


Fig. 11. Variation of ultimate load P_u with flange width ratio (ρ_b) at different flange thickness ratios (ρ_f) for $\rho = 0.5$, $f_c' = 30$ MPa & $a/h = 2$

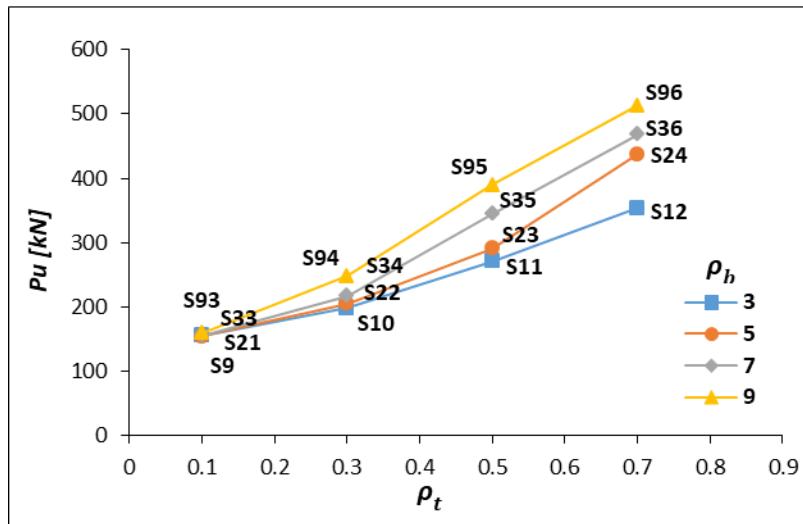


Fig. 12. Variation of ultimate load P_u with flange thickness ratio (ρ_t) at different flange width ratios (ρ_b) for $\rho = 0.5$, $f_c' = 30$ MPa & $a/h = 2$

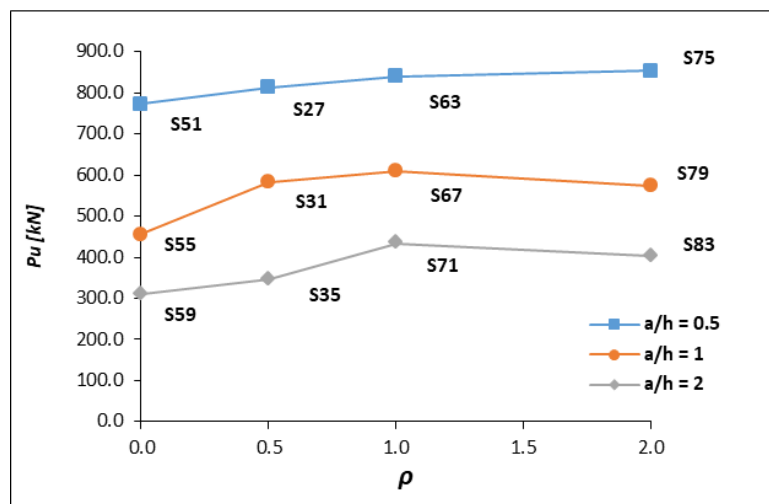


Fig. 13. Effect of flange longitudinal reinforcement on Ultimate load for different shear span to depth ratios for $\rho_b = 7$, $\rho_t = 0.5$ & $f_c' = 30$ MPa

3.8 Effect of Shear Span to Depth Ratio

Results for T-beams with different shear span to depth ratios ($a/h = 0.5, 1$, and 2) are shown in Figs. 14 and 15 for $\rho_t = 0.3$ and $\rho = 0.5$.

Fig. 14 presents variations of the ultimate shear strength with the shear span-to-depth ratio for $\rho_b = 7$ and two values of concrete characteristic strength ($f_c' = 30$ MPa and 60 MPa), $\rho_t = 0.3$, $\rho = 0.5$) and $\rho_b = 7$. For $f_c' = 30$ MPa, Fig. 15 depicts variations of the ultimate shear strength with the shear span-to-depth ratio at various flange widths ($\rho_b = 3, 5, 7$, & 9). The increase in (a/h) obviously reduced the shear capacity of flanged beams. In particular, decreasing the shear span

to depth ratio from 2.0 to 1.0 , and then to 0.5 increased the ultimate shear strength by an average of 49% and 120% , respectively. This trend is repeated for all flange widths and concrete strengths.

The load deflection curves for three T-beams that are identical but have different shear span to depth ratios ($a/h = 0.5, 1.0$, and 2.0) are presented in Fig. 16. The curve indicates that the beam toughness (I) is reduced as the shear span increases. Numerical values revealed that the toughness of beams having a/h of 1.0 and 2.0 were less than that of the similar beam with a/h of 0.5 by about 28% and 49% , respectively.

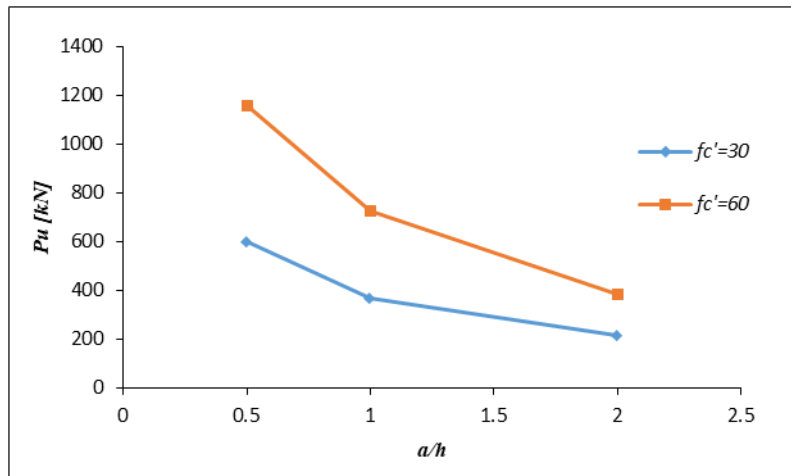


Fig. 14. Effect of shear span-to-depth ratio on ultimate shear strength of T-beams for two values of concrete characteristic strength ($\rho_b = 7, \rho_t = 0.3, \rho = 0.5$).

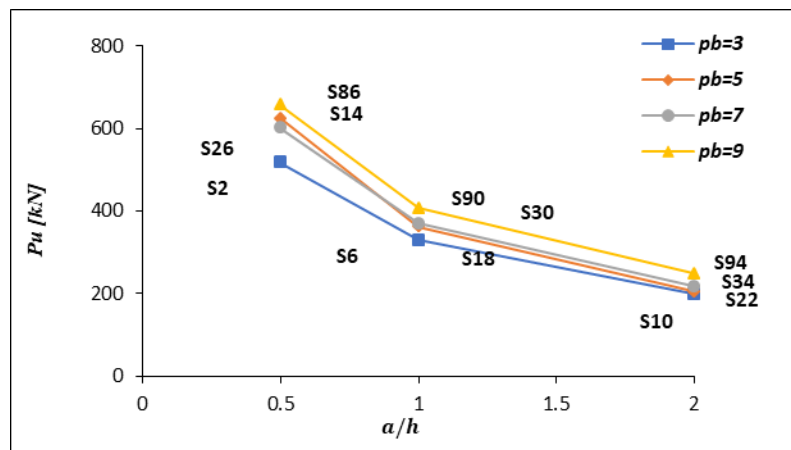


Fig. 15. Effect of shear span-to-depth ratio on ultimate shear strength of T-beams with various flange widths ($\rho_t = 0.3, \rho = 0.5$ & $f_c' = 30$ MPa)

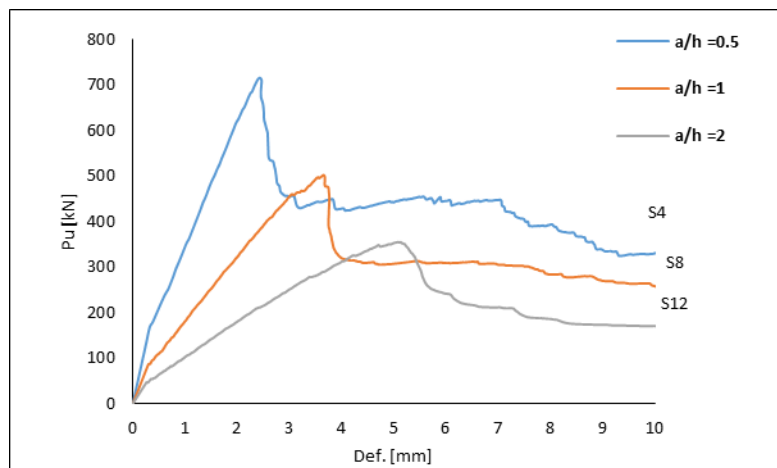


Fig. 16. Effect of shear span-to-depth ratio on load-deflection curves of flanged beams ($\rho_b = 3, \rho_t = 0.7, f_c' = 30$ MPa & $\rho = 0.5$)

3.9 Effect of Concrete Characteristic Strength

Values of the ultimate shear strengths calculated for 24 T-beams are displayed in Fig. 17. These values correspond to T-beams with one flange width $\rho_b=7$; four values of flange thickness $\rho_f=0.1, 0.3, 0.5$ & 0.7 ; and two values of concrete characteristic strengths ($f_c'=30$ and 60 MPa). Study of data in Fig. 17 and Table 3 showed that on average- doubling concrete strength of beams results in doubling the first-yield load and increases the first-crack load by about 20%. The increase in beam ultimate shear capacity varies with both shear span and flange thickness. Numerically, doubling f_c' lead to shear capacity increases of 65%:99% for $a/h=0.5$; 54%:97% for $a/h=1$; and 27%:88% for $a/h=2$. It is also noted

that the increase in shear capacity with increasing concrete strength becomes less pronounced as the span length or the flange thickness increases.

To examine the effect of concrete characteristic strength on beam toughness, the load-deflection relationship for beams with $f_c'=30$ and 60 MPa are presented in Fig. 18 for three flange thickness ratios $\rho_f=0.1, 0.3$ & 0.7 (other variables are $\rho_b=7, a/h=0.5$). Considerable increase with an average of 74% in beam toughness, I , is observed with the increase in f_c' from 30 to 60 MPa. Finally, Fig. 19 shows that the flexural crack pattern at failure is similar for beams with concrete strength of 30 to 60 MPa, while the use of higher concrete strength delayed the premature shear failure.

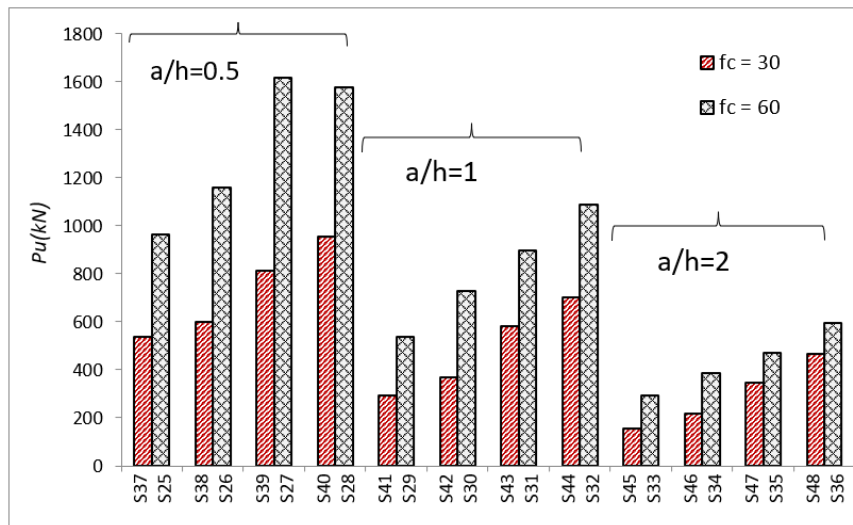


Fig. 17. Effect of concrete characteristic strength on shear capacity for beams with variable shear span to depth ratios ($\rho_b=7, \rho_f=0.1, 0.3, 0.5$ & 0.7)

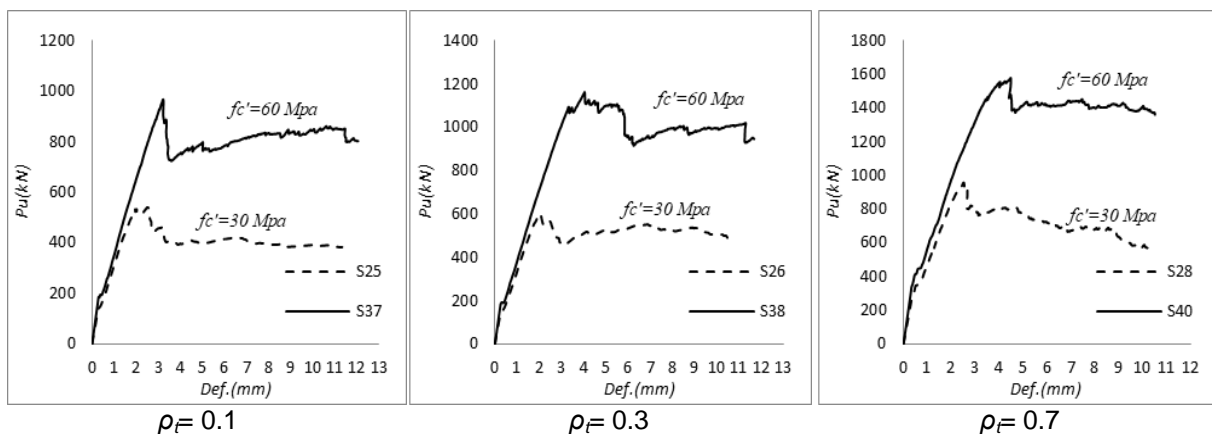


Fig. 18. Effect of concrete characteristic strength on load-deflection relationship for beams with variable flange thickness ($\rho_b=7, a/h=0.5$)

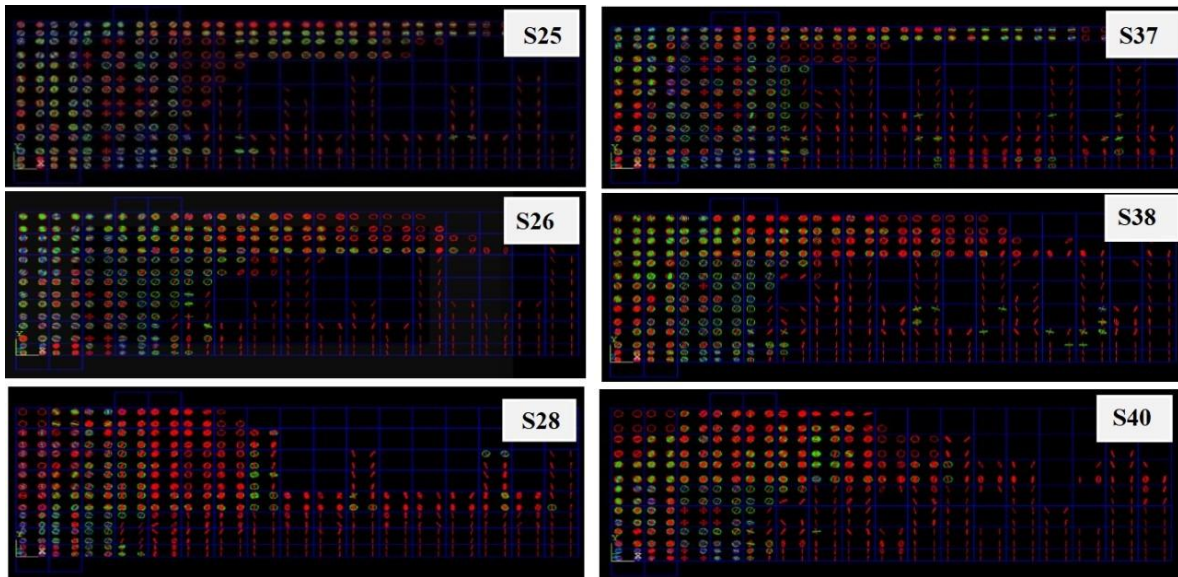


Fig. 19. Effect of concrete characteristic strength on crack patterns at failure for beams with variable flange thickness: $\rho_f=0.1$ for S25&37, 0.3 for S26&38, 0.7 for S28&40 ($\rho_b=7$, $a/d=0.5$ & $\rho=0.5\%$)

4. CONCLUSIONS

The following remarks are concluded based on analysis ANSYS finite element results of the validated model:

1. Good general agreement is observed between the results of the developed nonlinear FE model (by ANSYS) and the corresponding experimental results in terms of load-deflection relationships, crack patterns and propagation, and failure modes. The average value of the ultimate load ratios ($P_{u(FE)}/P_{u(EXP)}$) and ultimate deflection ratios ($\Delta_{u(FE)}/\Delta_{u(EXP)}$) was 1.03 and 0.87, respectively.
2. The most important parameters in improving the shear capacity of T-beams are the ratio of flange thickness to beam depth (t/h) followed by the ratio of flange width to web width (b_f/b_w). Presence of flange with (t/h) = 0.1 to 0.7 increased the shear strength P_u by 10% to 150% for (b_f/b_w) = 3 and by 12% to 260% for (b_f/b_w) = 9. Thus, the effect of flange thickness is more pronounced. For thin flanges ($t/h = 0.10$), increasing flange width does not help.
3. Increasing flange longitudinal reinforcement, ρ , from 0% to 2% increased the beam ultimate load by an average of 8%, 29%, and 27% for shear span to depth ratio (a/h) of 0.5, 1.0, and 2; respectively.

4. Investigation of the load deflection curves for identical T-beams that have different shear spans indicated that the beam toughness (I) decreases as the shear span increases. In particular, the toughness of beams with a/h of 1.0 and 2.0 were less than that of the similar beam with a/h of 0.5 by about 28% and 49%, respectively.
5. Increasing the concrete characteristic strength f_c' from 30 to 60 MPa increased the beam shear capacity by 65%:99% for $a/h = 0.5$; 54%:97% for $a/h=1$; and 27%:88% for $a/h=2$.
6. The results of this study could help in reducing projects' cost by including the contribution of thick compressed flanges to the shear strength of T-beams.

COMPETING INTERESTS

Authors have declared that no competing interests exist.

REFERENCES

1. Hesham A. A. and Wael M. M., "Shear behavior of reinforced lightweight concrete T-beams," Life Science Journal. 2019; 16(8).
2. Balamuralikrishnan R, Saravanan J. Finite Element Modelling of RC T - Beams Reinforced Internally with GFRP Reinforcements. Civil Engineering Journal. 2019;5(3).

3. Hamdy KS, Mohamed MH, Mahmoud AK, Mahmoud YAZ. Finite Element Analysis on the behavior of Strengthened RC Shallow T-Beams with Large Openings at Shear Zone Using CFRP and BFRP sheets. IJSEAS. 2017;3(11).
4. Hugo CB, Carlos C, Manuel AG. A smeared Crack Analysis of Reinforced Concrete T-Beams Strengthened with GFRP Composites. Engineering Structures. 2013;56:1346-1361.
5. Pansuk W, Sato Y. Shear mechanism of reinforcement concrete t-beams with stirrups. Journal of Advanced Concrete Technology. 2007;5(3):395-408.
6. Pansuk W, Sato Y, Takahashi R, Ueda T. Influence of Top Flange to Shear Capacity of Reinforced Concrete T-Beams. Concrete Engineering Annual Papers. 2004;26(2).
7. Giaccio C, Al-Mahaidi R, Taplin G. Experimental study on the effect of flange geometry on the shear strength of reinforced concrete T-beams subjected to concentrated loads. Can. J. Civ. Eng. 2002;29:911-918.
8. ANSYS-Release Version 19.2.0., "A Finite Element Computer Software and User Manual for Nonlinear Structural Analysis," ANSYS Inc. Canonsburg, PA 15317; 2018.
9. Kachlakev D, Miller T. Finite Element Modeling of Reinforced Concrete Structures Strengthened with FRP Laminates. Final Report, Oregon Department of Transportation. Salem, Oregon; 2001.
10. Musmar MA, Rjoub MI, Abdel Hadi MA. Nonlinear Finite Element Analysis of Shallow Reinforced Concrete Beams Using SOLID65 Element. ARPN Journal of Engineering and Applied Sciences. 2014;9(2):85-89
11. Tjitradi D, Eliatun E, Taufik S. 3D ANSYS Numerical Modeling of Reinforced Concrete Beam Behavior under Different Collapsed Mechanisms. International Journal of Mechanics and Applications. 2017;7(1):14-23
12. Shah SP, Swartz SE, Ouyang C. Fracture Mechanics of Concrete. John Wiley & Sons, Inc., New York; 1995.
13. Bangash MYH. Concrete and Concrete Structures: Numerical Modeling and Applications. Elsevier Science Publishers Ltd., London, England; 1989.
14. Gere JM, Timoshenko SP. Mechanics of Materials. PWS Publishing Company, Boston, Massachusetts; 1997.
15. ACI Committee 318. Building Code Requirements for Structural Concrete ACI. 2014;318-14.
16. Ramadan OM, Abdel-Kareem AH, El-Azab IA, Abousafa HR. Flange Contribution to the Shear Strength of RC T-Beams with Flange in Compression". Buildings. 2022; 12(6):803.

© 2023 Ramadan et al.; This is an Open Access article distributed under the terms of the Creative Commons Attribution License (<http://creativecommons.org/licenses/by/4.0>), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Peer-review history:

The peer review history for this paper can be accessed here:

<https://www.sdiarticle5.com/review-history/97036>