

Effect of Abattoir Waste on Surface Water Quality Parameters of Iwofe River, Port-Harcourt, Rivers State, Nigeria

M. K. Ndukwe ^{a*}, C. E. Igara ^a, O. J. Nkama ^a, C. O. Ibe ^a,
O. E. Okoro ^a, E. O. Nnnachi ^a and I. E. Atiaetuk ^a

^a Department of Science Laboratory Technology, Akanu Ibiam Federal Polytechnic, Unwana, Nigeria.

Authors' contributions

This work was carried out in collaboration among all authors. All authors read and approved the final manuscript.

Article Information

DOI: 10.9734/JGEESI/2023/v27i9708

Open Peer Review History:

This journal follows the Advanced Open Peer Review policy. Identity of the Reviewers, Editor(s) and additional Reviewers, peer review comments, different versions of the manuscript, comments of the editors, etc are available here: <https://www.sdiarticle5.com/review-history/103174>

Original Research Article

Received: 18/05/2023

Accepted: 20/07/2023

Published: 10/08/2023

ABSTRACT

Indiscriminate discharge of abattoir wastewater has been a major cause of concern globally due to its negative effect on the environment. This study analyzed the effect of abattoir waste on surface water quality parameters the of Iwofe River, Port-Harcourt, and the River's state using standard methods. The water samples were collected at three different points (upstream, midstream, and downstream) and the results were analyzed using Oneway ANOVA at $p = 0.05$. From the results; temperature, pH, salinity, conductivity, oxidation-reduction potential, and turbidity were in the range of 28.50 – 29.70 °C, 7.19 – 7, 3.00 – 6.35 PSU, 5059 – 11208 $\mu\text{S}/\text{cm}$, 91.70 – 164.80 mV, and 59.60 – 78.10 NTU respectively. Although the temperature was slightly above WHO standards, pH, Electrical conductivity, and Turbidity were all within WHO acceptable limits. TDS, TSS, DO, BOD₅, and COD were in the range of 2542 - 5604 mg/L, 2.90 – 7.75 mg/L, 5.90 – 12.90 mg/L, 0.42 – 3.08 mg/L, and 5.90 – 18.50 mg/L respectively. DO and TS were above WHO permissible limit while BOD₅, COD, TSS, COD, and ORQ were within WHO permissible limit in all samples. Total alkalinity, hardness, Cl⁻, CO₃²⁻, and NO₃⁻ were 25 – 113 mg/L, 990.00 – 1256.00 mg/L, 3669.08 –

*Corresponding author: E-mail: mcaifpu@gmail.com;

7887.63 mg/L, 12.50 to 66.00 mg/L, 0.85 – 1.08 mg/L. SO_4^{2-} , PO_4^{2-} , oil and grease, and total coliform were in the range of 133.56 – 283.17 mg/L, 90.00 – 100.00 mg/L, 0.10 – 0.15 mg/L, 1.34×10^4 to 2.98×10^5 cfu/mL. Total Alkalinity was within limit only in upstream, while hardness, Cl^- , NO_3^- , SO_4^{2-} , and total coliform were all above WHO permissible limit in drinking water. Heavy/trace metals results ranged as follow; As (<0.001 – 0.009 mg/L), Pb (<0.001 – 0.002 mg/L), Zn (<0.001), Fe (0.019 – 0.285 mg/L), K (8.245 – 8.540 mg/L), Mn (<0.001 – 0.005 mg/L), Mg (3.345 – 4.076 mg/L), Ca (2.452 – 4.085 mg/L), Ni (0.002 – 0.010 mg/L), Cu (<0.001 – 0.006 mg/L), Cr (0.001 – 0.003 mg/L), Cd (0.006 – 0.013 mg/L). As, Pb, Zn, K, Mn, and Ca were not above WHO permissible limit, but were present in significant amount indicating that the river was gradually being polluted with metals. Most of the water quality parameters did not meet WHO permissible limits for drinking water. Also, the study indicates that the meat processing industry can potentially reduce water portability, thereby adversely affecting the range of its uses. Hence the activities of the abattoir should be monitored closely by relevant agencies in order to prevent full-blown environmental problems and health hazards in the near future.

Keywords: Wastewater; abattoir; hazards; water.

1. INTRODUCTION

The direct release of wastewater from abattoirs to surrounding water bodies such as lakes, streams, Rivers (tributaries and meanders), seas, and oceans contributes a lot to water pollution. These wastewaters often enter water bodies through the washing of killed animal blood, dung, runoff from human body waste, feces from toilets nearby in the abattoir site, and waste from animal feeds. These phenomena arising from human activities are now of global concern as illustrated by Hillel et al. [1]. This is due to the scientific analysis that the discharge of untreated high-strength wastewater into water bodies results in water quality deterioration of the recipient water bodies according to Terrumun and Oliver [2].

The Abattoir is a place where animals are slaughtered for the purpose of production of meat/protein which are supplied to the public. As much as the activity and its individual operations are to provide the needed source of protein, the way and manner it is handled and its byproducts or wastes sadly could constitute hazards when the proper steps are not taken into cognizance [3].

As worse as it could get, there are indicators that scientifically elaborate the above by showing that elevated levels of nutrients (nitrogen and phosphorus) in surface water due to this type of pollution emanating from human-related activities at local slaughterhouses and butcherries accelerate the growth of oxygen-depleting microorganisms whose excessive growth destroy the aquatic ecosystems and result in eutrophication of these water bodies aforementioned, (Zhang et al., 2014).

The impact of these damages is interwoven ecologically as well as biologically, chemically and physically, [2]. Ecologically, harmful algal blooms (spontaneous and uncontrolled growth of algae), dead zones (areas in water bodies where aquatic life cannot survive because of low oxygen levels these are generally caused by significant nutrient pollution), and fish kills (unexpected mass mortality of wild fish over a short period of time usually attributable to pollution or contamination of waters or a combination of natural and human-induced stresses in the environment.) are the results of a process which occurs when the environment becomes highly and suddenly enriched with nutrients—eutrophication [4].

Wastes from animal bowels (faces and urine from ruminants and others), their feed, decayed body parts and blood during slaughtering can be a source of pollution when it is not managed [5].

Previous studies have shown that waste from abattoirs pose a great risk to recipient water bodies due to its potential high content of pathogens [6]. Also, if the animals are not housed, there may also be issues of erosion and sediment transport into surface waters due to their grazing activities [2].

However, pollution of surface water from abattoir wastewater and run-offs constitutes substantial ecological and health threats due to the higher levels of biodegradable organic matter, excessive alkalinity, phosphorous, nitrogen and micronutrient concentrations as described by Del-Nery et al. [7].

In Iwofe area of Obio/Akpor Local Government area of Rivers state, the wastewater from the

killed animals and the washed slab where the animals are butchered have a channel the water flows from to the New Calabar River very close to it (approximately a few meters away).

Interestingly, some organic waste may be able to be diluted in the river at very minimal concentrations with the tidal characteristics of the river; it can self-cleanse by natural biological processes according to Mutamim et al. [8].

In the light of the above, the research aims to decipher the impact of the slaughterhouse waste (discharged directly and by run-offs) on the physico-chemical parameters, microbiological indicators, and heavy metal content of the surface water (Iwofe River) since it is of use to humans in many ways and the aquatic community.

2. MATERIALS AND METHODS

2.1 Study Area

Iwofe, the community facing the New Calabar River (Iwofe River) houses the Ignatius Ajuru University and student lodges all-round the area (first and second Erico, Azumini police station, and eagle cement area). It is located in the Obio-Akpor local government area in the metropolis of Port Harcourt. Iwofe Abattoir area is bordered by a small market directly facing a lodge accommodation for students. Also, the water is

used to wash off the blood and stains and cow dung is dropped off during the slaughtering of the animals. Coordinates taken of the area showed the locations where samples were got for upstream, midstream, and downstream on a google earth map (Fig. 1).

2.2 Sample Collection

Water samples was be gotten from the New Calabar River which rendezvous the Iwofe slaughter axis in River's State in varying depths using standard sampling methods. The surface water collection involves rinsing each labeled container with the water at the exact geo-referenced point (Upstream, Midstream, and Downstream) recording the time and coordinates. Samples collected for the analysis of heavy metals were preserved using nitric acid while other samples will be placed in ice-packed ice chests [9].

2.3 Water Quality Parameters Analysis

Temperature, pH, Electrical conductivity (EC), Total Dissolved Solids (TDS), Total Suspended Solid (TSS), Total Hardness, Carbonates, phosphates, Sulphates, Nitrates, Salinity, Alkalinity, Chloride Turbidity, Dissolved Oxygen (DO), Biochemical Oxygen Demand (BOD₅) and Oxidation Reduction Potential (ORP) were analyzed using HANNA Multi-parameter Meter [9].

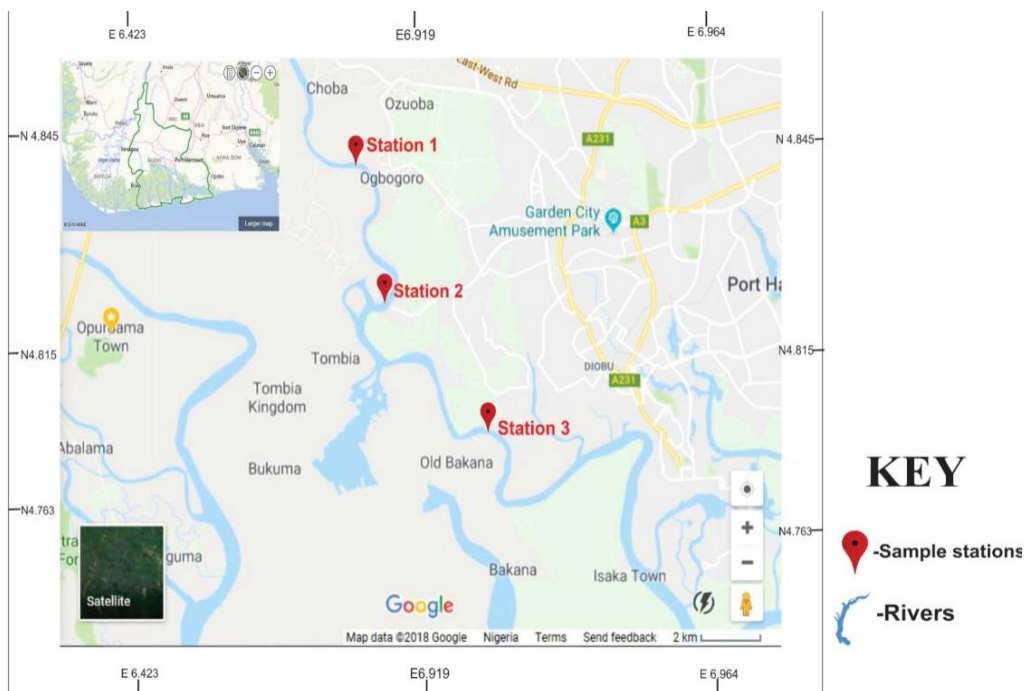




Fig. 1. Location map showing sampling points on the Iwofe river
(Adopted from Wikipedia)

2.3.1 Metals

Metal ions were determined using APHA 3030 G (Nitric acid – Sulphuric Acid Digestion) and APHA 3030 F (Nitric acid – Hydrochloric Acid Digestion) standard methods. The samples after undergoing pretreatments were analyzed for heavy metals and trace metals using Atomic Absorption Spectrophotometer (AAS) [9].

2.3.2 Microbiological analysis

Fecal and Total Coliform counts will be performed using the standard membrane filtration technique. The 100 mL water sample will be filtered using a 0.45 mm pore size, 47 mm diameter filter membrane as described by APHA [10].

2.4 Calculation of Water Quality Index

The WQI was calculated using the three steps.

Step: 1 – Unit weight (W_n) factors for each parameter was calculated using the formula

$$W_n = K/S_n$$

Where,

W_n = unit weight for nth parameter.

The unit weight (W_n) of each parameter is proportional to the weightage of each parameter; n is the number of water quality parameters.

S_n = standard permissible value for nth parameter
k = proportionality constant.

Step: 2 Calculate the Sub-index (Q_n) value using formula

$$Q_n = [(V_n - V_i) \div (V_s - V_i)] \times 100$$

Where,

V_n – Observed value
 V_i – Ideal value (Generally $V_o = 0$ for most parameters except pH and DO is 7 and 14.6)
 V_s – Standard value

Step: 3 Combining Step 1 and Step 2, WQI is calculate as follows.

$$WQI = \frac{\sum_{n=1}^n q_n W_n}{\sum_{n=1}^n W_n} [11]$$

2.5 Statistical Analysis

The analyses of water quality parameters were done in triplicates and the relationship between the upstream, midstream, and downstream water samples was analyzed at a 0.05 significance level using One-way analysis of variance (ANOVA) of the Statistical Package for Social Sciences (SPSS).

3. RESULTS AND DISCUSSION

The results of the analysis of water quality parameters of Iwofe River are shown in Table 1 and Table 2.

From the results in Table 1, the mean temperature of the water samples (upstream, midstream, and downstream) was significantly different ($F_{2, 6} = 56.00, p < 0.001$). The temperature was also above the ambient temperature specified by WHO for surface water.

The mean pH (Table 1) was significantly different for at least one of the sample collections ($F_{2, 6} = 5.306, p = 0.047$). The Tukey post hoc test showed that there was no statistically significant difference ($p = 0.119$) between the pH upstream and midstream water samples. However, the

downstream was significantly higher than the upstream ($p = 0.047$), while the midstream and the downstream showed no significant difference

($p = 0.754$). The pH was all within the WHO permissible limit of 6.5 – 8.5, with downstream having a higher pH of 7.36.

Table 1. Results of physicochemical analysis of water samples from Iwofe river

Parameter	Water sample			*WHO limit
	Upstream	Midstream	Downstream	
Temperature (°C)	28.50 ± 0.10 ^a	29.70 ± 0.20 ^c	29.30 ± 0.10 ^b	Ambient
pH	7.19 ± 0.02 ^a	7.32 ± 0.11 ^{a, b}	7.36 ± 0.03 ^b	6.50 – 8.50
Salinity (PSU)	6.35 ± 0.30 ^b	3.00 ± 0.01 ^a	3.30 ± 0.03 ^a	NG
TDS (mg/L)	5604 ± 5.00 ^c	2542 ± 3.00 ^a	3088 ± 2.00 ^b	500.00
EC (µS/cm)	11208 ± 7.00 ^c	5059 ± 5.00 ^a	6151 ± 11.00 ^b	1000.00
Turbidity (NTU)	67.10 ± 1.20 ^b	78.10 ± 3.40 ^c	59.60 ± 1.50 ^a	5.00
DO (mg/L)	12.90 ± 0.30 ^c	9.26 ± 0.13 ^b	5.90 ± 1.10 ^a	5.00
ORP (mV)	164.80 ± 2.10 ^c	91.70 ± 0.30 ^a	109.50 ± 3.30 ^b	NG
TSS (mg/L)	7.75 ± 0.15 ^c	3.05 ± 0.03 ^b	2.90 ± 0.10 ^a	35
Total Solids (TS) (mg/L)	5611.75 ± 3.8 ^c	2545.05 ± 4.3 ^a	3090.9 ± 1.6 ^b	1000
BOD ₅ (mg/L)	0.42 ± 0.01 ^a	0.60 ± 0.01 ^b	3.08 ± 0.11 ^c	5.00
COD (mg/L)	5.90 ± 0.02 ^a	6.25 ± 0.01 ^b	18.50 ± 0.10 ^c	NG
Alkalinity (mg/L)	25.00 ± 3.00 ^a	113 ± 5.00 ^c	57.00 ± 2.00 ^b	50.00
Total Hardness(mg/L)	1123 ± 2.00 ^b	990 ± 7.00 ^a	1256 ± 5.00 ^c	150.00
Oil and Grease (mg/L)	0.15 ± 0.01 ^c	0.10 ± 0.01 ^a	0.11 ± 0.01 ^b	NG
Cl ⁻ (mg/L)	7887.63±5.33 ^c	3669.08±9.40 ^a	4112.20±3.70 ^b	250.00
CO ₃ ²⁻ (mg/L)	12.50 ± 1.30 ^a	66 ± 3.00 ^c	28.50 ± 1.40 ^b	NG
NO ₃ ⁻ (mg/L)	0.85 ± 0.01 ^a	0.99 ± 0.01 ^b	1.08 ± 0.02 ^c	50.00
SO ₄ ²⁻ (mg/L)	283.17 ± 4.10 ^c	133.56 ± 1.70 ^a	144.67 ± 2.50 ^b	250.00
PO ₄ ²⁻ (mg/L)	90 ± 2.00 ^a	100 ± 1.00 ^b	99.30 ± 0.80 ^b	NG
Total Coliform (cfu/ml)	1.38 × 10 ⁴	2.13 × 10 ⁵	2.98 × 10 ⁵	10

The values are in mean ± standard deviation (SD). Values followed by different letters on the same row are significantly different ($p < .05$). NG = No Guideline. * = WHO 2004 guideli

Table 2. Results of trace/heavy metal analysis of water samples from Iwofe river

Parameter	Water sample			*WHO Limit
	Upstream	Midstream	Downstream	
As (mg/L)	0.009	0.005	<0.001	0.01
Pb (mg/L)	0.002	0.001	<0.001	0.01
Zn (mg/L)	<0.001	<0.001	<0.001	3.000
Fe (mg/L)	0.285	0.019	0.082	0.300
K (mg/L)	8.540	8.245	8.270	12.000
Mn (mg/L)	0.003	<0.001	0.005	0.200
Mg (mg/L)	4.076	3.345	3.479	0.200
Ca (mg/L)	4.085	2.452	2.584	75.000
Ni (mg/L)	0.006	0.002	0.010	0.020
Cu (mg/L)	0.006	<0.001	0.003	2.000
Cr (mg/L)	0.003	0.001	0.002	0.050
Cd (mg/L)	0.006	0.006	0.013	0.003

* = WHO 2004 guideline

Table 3. Water quality index grading

Water Quality Index	Level Status	Grading
0-25	Poor water quality	C
26-50	Poor water quality	C
51-75	Very poor water quality	D
76-100	Unsuitable for drinking and fish culture	E

The mean salinity (Table 1) was significant for at least one of the sample collections ($F_{2, 6} = 341.685$, $p < 0.001$). The Tukey post hoc test showed no significant difference ($p = 0.167$) between midstream and downstream. The upstream was significantly higher than the midstream and downstream ($p < 0.001$).

The mean electrical conductivity of the water samples (upstream, midstream, and downstream) was statistically significant ($F_{2, 6} = 323224.200$, $p < 0.001$). The Tukey post hoc test showed significant differences for each sample group ($p < 0.001$). The electrical conductivity was also above the WHO permissible limit of 1000 $\mu\text{S}/\text{cm}$, with upstream having the highest electrical conductivity as shown in Table 1.

The mean turbidity of the water samples (upstream, midstream, and downstream) was statistically significant ($F_{2, 6} = 51.098$, $p < 0.001$). The Tukey post hoc test showed significant differences for each sample group ($p < 0.001$). The turbidity was also above the WHO permissible limit of 5.0 NTU, with midstream having the highest electrical conductivity as shown in Table 1.

The mean dissolved oxygen (DO) of the water samples (upstream, midstream, and downstream) was statistically significant ($F_{2, 6} = 83.764$, $p < 0.001$). The Tukey post hoc test showed significant differences for each sample group ($p < 0.001$). The DO was also above the WHO permissible limit of 5.0 mg/L, with upstream having the highest DO as shown in Table 1.

The mean oxidation-reduction potential (ORP) of the water samples (upstream, midstream, and downstream) was statistically significant ($F_{2, 6} = 849.760$, $p < 0.001$). The Tukey post hoc test showed a significant difference for each sample group ($p < 0.001$), with upstream having the highest ORP as shown in Table 1.

The mean TDS (Table 1) of the water samples (upstream, midstream, and downstream) was statistically significant ($F_{2, 6} = 631745.368$, $p < 0.001$). The Tukey post hoc test showed significant differences for each sample group ($p < 0.001$). The TDS was also above the WHO permissible limit of 500 mg/L, with upstream having the highest TDS.

The mean TSS (Table 1) of the water samples (upstream, midstream, and downstream) was

statistically significant ($F_{2, 6} = 2049.476$, $p < 0.001$). In the Tukey post hoc test upstream was significantly higher than midstream and downstream ($p < 0.001$). On the other hand, there was no significant difference between midstream and downstream ($p = 0.226$). TSS of the water samples was within the WHO permissible limit of 35 mg/L; upstream had the highest TSS.

The mean total solids (TS) of the water samples (upstream, midstream, and downstream) were statistically significant ($F_{2, 6} = 678668.040$, $p < 0.001$). The Tukey post hoc test showed a significant difference for each sample group ($p < 0.001$), with upstream having the highest TS. The TS was also above the WHO permissible limit of 1000 mg/L as shown in Table 1.

The mean alkalinity (Table 1) of the water samples (upstream, midstream, and downstream) was statistically significant ($F_{2, 6} = 469.895$, $p < 0.001$). The Tukey post hoc test showed significant differences for each sample group ($p < 0.001$). The mean alkalinity of the upstream water sample was within the WHO permissible limit of 50 mg/L, midstream was above the permissible limit while downstream was slightly above the limit.

The mean total hardness (Table 1) of the water samples (upstream, midstream, and downstream) was statistically significant ($F_{2, 6} = 2041.038$, $p < 0.001$). The Tukey post hoc test showed significant differences for each sample group ($p < 0.001$) with downstream having the highest concentration. The mean total hardness of all the water samples was within the WHO permissible limit of 150 mg/L.

The mean Cl^- (Table 1) of the water samples (upstream, midstream, and downstream) was statistically significant ($F_{2, 6} = 370764.943$, $p < 0.001$). The Tukey post hoc test showed significant differences for each sample group ($p < 0.001$). The Cl^- was also above the WHO permissible limit of 250 mg/L, with upstream having the highest concentration.

The mean CO_3^{2-} (Table 1) of the water samples (upstream, midstream, and downstream) was statistically significant ($F_{2, 6} = 536.502$, $p < 0.001$). The Tukey post hoc test showed significant differences for each sample group ($p < 0.001$) with midstream having the highest concentration.

The mean NO_3^- of the water samples (upstream, midstream, and downstream) was statistically significant ($F_{2,6} = 201.500, p < 0.001$). The Tukey post hoc test showed significant differences for each sample group ($p < 0.001$) with downstream having the highest concentration. The NO_3^- of all the water samples was below the WHO permissible limit of 50 mg/L as shown in Table 1.

The mean SO_4^{2-} of the water samples (upstream, midstream, and downstream) was statistically significant ($F_{2,6} = 2409.759, p < 0.001$). The Tukey post hoc test showed significant differences for each sample group ($p < 0.001$) with upstream having the highest concentration. The amount of SO_4^{2-} midstream and downstream water samples was below the WHO permissible limit of 250 mg/L while upstream was above it as shown in Table 1.

The mean PO_4^{2-} (Table 1) of the water samples (upstream, midstream, and downstream) was statistically significant ($F_{2,6} = 536.502, p < 0.001$) for at least one of the sample collections. The Tukey post hoc test showed midstream was not significantly higher than downstream ($p = 0.812$) but significantly higher than upstream ($p < 0.001$).

The mean BOD_5 (Table 1) of the water samples (upstream, midstream, and downstream) was statistically significant ($F_{2,6} = 1616.878, p < 0.001$). The Tukey post hoc test showed upstream was significantly lower than midstream ($p = 0.032$) downstream ($p < 0.001$). The BOD_5 of all the water samples was within the WHO permissible limit of 5.0 mg/L.

The mean COD (Table 1) of the water samples (upstream, midstream, and downstream) was statistically significant ($F_{2,6} = 44135.00, p < 0.001$). The Tukey post hoc test showed significant differences for each sample group ($p < 0.001$) with downstream having the highest concentration.

The mean oil and grease (Table 1) of the water samples (upstream, midstream, and downstream) was statistically significant ($F_{2,6} = 44135.00, p = 0.002$). The Tukey post hoc test showed that upstream was significantly higher than midstream ($p = 0.002$) and downstream ($p = 0.006$), whereas there was no significant difference between midstream and downstream ($p < 0.483$).

The total coliform count of the various water samples was above the WHO permissible limit of

10cfu/ml; with downstream having the highest coliform count as shown in Table 1.

The results in Table 2 shows that the concentration of arsenic (As) was in the range of $<0.001 - 0.009$ mg/L and was within the WHO threshold limit of 0.01 mg/L; upstream having the highest level of As. Lead (Pb) was below the WHO permissible limit of 0.01 mg/L; upstream had a higher concentration. Zinc was also below the WHO threshold limit of 3.0 mg/L with each of the water samples having less than 0.001 mg/L. Iron (Fe) and potassium (K) were below the WHO permissible limits, upstream recording higher concentrations in each case. Manganese (Mn) was highest downstream but below the WHO limit of 0.30 mg/L. All the water samples recorded high concentrations of magnesium (Mg) which was above the WHO threshold limit of 0.20 mg/L; upstream was the highest. The concentrations of calcium (Ca), copper (Cu), and chromium (Cr) were below the WHO permissible limit with upstream recording higher concentrations in each case. On the other hand, downstream was higher in nickel (Ni) and cadmium (Cd), but while Ni was below WHO limit; Cd concentration was above the 0.003 mg/L limit in all three samples.

The water quality index grading is summarized in Table 3 according to the varying depth of the river where samples were collected [12-19]. With respect to drinking water quality, the river falls under category C, D, and E, that is not suitable for drinking and of poor water quality. The higher values of WQI are contributed to very high turbidity and phosphate values. Hence the WQI index reveals that river water is not suitable for drinking and domestic activities without proper treatment and disinfection, this trend is similar to the trend observed by Misha, et al.,[11].

4. CONCLUSION

The results of this analysis carried indicate that the level of contamination of the Iwofe River significantly affects its water quality parameters, with most of the results exceeding WHO permissible limits. The upstream was highly affected by the trend of contaminations due to its proximity to the abattoir site. It can be inferred that the direct discharge of various streams of untreated abattoir waste is a major contributor to the poor quality of the water body. Although some heavy/trace metals were still within recommended standards, it is however under threat if the present habit of discharging

untreated abattoir wastes continues. Residents living in the abattoir vicinity may in no distant time begin to experience severe consequences of pollutants from abattoir activities located in their neighborhood. Hence there is a need for proper waste management and disposal.

5. RECOMMENDATIONS

In view of the findings of this work, and due to the fact that the abattoir is located at Ignatius Ajuru University, with student lodges all-round the area, and also in view of the fact that the discharge of untreated abattoir wastes may continue unabated, the following recommendations are made:

- In line with national and international efforts being made to safeguard the water environment, provide clean water as well as protect human health, sanitation in our local meat processing industries should be closely monitored.
- The enforcement of existing health and hygiene regulations, as well as the provision of standard equipment and functional units within abattoirs, should be encouraged.
- Efforts should be made to commence activities towards the relocation of the abattoir to an area away from residential areas.
- Immediate steps should be taken to put in place machinery that will enable treatment of the abattoir wastes before they are disposed of.
- Aggressive public awareness and enlightenment on the possible impacts of pollution from abattoir wastes should be embarked upon by relevant agencies.

COMPETING INTERESTS

Authors have declared that no competing interests exist.

REFERENCES

1. Hillel N, Geyer S, Licha T, Khayat S, Laronne JB, Siebert C. Water quality and discharge of the lower Jordan River. *Journal of Hydrology*. 2015;527:1096 – 1105.
2. Terrumun KK, Oliver TI. Assessment of the impact of abattoir effluent on the water quality of river Kaduna, Nigeria. *World Journal of Environmental Engineering*. 2015;3(3):87 – 94.
3. Mamhobu-Amadi WC, Kinigoma BS, Momoh YLO, Oji AA. Abattoir operations and waste management options: A review. *International Journal of Advanced Engineering Research and Science*. 2019;6(12):226–231. Available:https://dx.doi.org/10.22161/ijaers.612.19.
4. Badruzzaman M, Pinzon J, Oppenheimer J, Jacangelo JG. Sources of nutrients impacting surface waters in Florida: A review. *Journal of Environmental Management*. 2012;109:80–92.
5. Osibanjo O, Daso AP, Gbadebo AM. The impact of industries on surface water quality of river Ona and river Alaro in Oluyole industrial estate, Ibadan, Nigeria. *African Journal of Biotechnology*. 2011;10(4):696 – 702.
6. Arimoro FO. Impact of rubber effluent discharges on the water quality and macroinvertebrate community assemblages in a forest stream in the Niger Delta. *Chemosphere*. 2009;77(3):440 – 449.
7. Del-Nery V, de-Nardi IR, Damianovic MHRZ, Pozzi E, Amorim AKB, Zaiat M. Long-term operating performance of a poultry slaughterhouse wastewater treatment plant. *Resources, Conservation and Recycling*. 2007;50(1):102 – 114.
8. Mutamim NSA, Noor ZZ, Hassan MAA, Yuniarto A, Olsson G. Membrane bioreactor: Applications and limitations in treating high strength industrial wastewater. *Chemical Engineering Journal*. 2013;225:109 – 119.
9. American Public Health Association, (APHA). *Standard methods for examination of water and waste water (23rd ed)*. Washington ,DC: America Public Health Association; 2017.
10. American Public Health Association, (APHA). *American Water and Works Association and Water Environment Federation, Standard Methods for the Examination of Water and Wastewater*. 20th edition. APHA Publication, Washington DC; 1998.
11. Misha R, Farzana S, Saibal C. Evaluation of physicochemical and biological parameters on the water quality of Shilabati river, West Bengal, India. *Water Science*. 2021;35(1):71-81. DOI: 10.1080/23570008.2021.1928902
12. Brown RM, McClelland NJ, Deininger RA, O'Connor MF. A water quality index-

- crossing the psychological barrier, Jenkis SH.[Ed]. Proc Int Conf On Water Pollution Res, Jerusalem. 1972;6:787–797.
13. Adesemoye AO, Opere BO, Makinde SCO. Microbial Content of abattoir wastewater and its contaminated soil in Lagos, Nigeria. African Journal of Biotechnology. 2006;5(20):1963 – 1968.
 14. Adeyemo OK, Ayodeji IO, Aiki-Raji CO. The water quality and sanitary conditions in a major abattoir (Bodija) in Ibadan, Nigeria. African Journal of Biomedical Research. 2002;5:51 - 55.
 15. Ubwa ST, Atoo GH, Offem JO, Abah J, Asemave K. An assessment of surface water pollution status around Gboko abattoir. African Journal of Pure and Applied Chemistry. 2013;7(3):131 – 138. DOI: 10.5897/AJPAC2013.0486
 16. Tamenech B, Tamirat H. Review on abattoir waste management. Global Veterinaria. 2017;19(2):517 – 524. DOI: 10.5829/idosi.gv.2017.517.524
 17. Tekenah WE, Agi PI, Babatunde BB. Analysis of surface water pollution from abattoirs and the interrelationship between physico-chemical properties (A case study of the New Calabar River). IOSR Journal of Environmental Science, Toxicology and Food Technology (IOSR-JESTFT). 2014;8(5):10 – 18. Available:<https://www.researchgate.net/publication/263453297>
 18. WHO. Guideline for drinking water quality. 3rd edition. World Health Organization, Geneva. 2004:1 – 515.
 19. Available:<https://www.maplandia.com/Nigeria>

© 2023 Ndukwe et al.; This is an Open Access article distributed under the terms of the Creative Commons Attribution License (<http://creativecommons.org/licenses/by/4.0>), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Peer-review history:

The peer review history for this paper can be accessed here:

<https://www.sdiarticle5.com/review-history/103174>