



## Quality of Service Reliability: A Study of Received Signal Quality in GSM Networks

Joel Iloke <sup>a</sup>, Ukoette Jeremiah Ekah <sup>a\*</sup>, Enobong Joseph Oduobuk <sup>b</sup>,  
Igwe Ewona <sup>a</sup> and Emmanuel Obi <sup>a</sup>

<sup>a</sup> Department of Physics, Cross River University of Technology, Calabar, Nigeria.

<sup>b</sup> Department of Physics with Electronics, Topfaith University, Mkpatak, Nigeria.

### Authors' contributions

*This work was carried out in collaboration among all authors. All authors read and approved the final manuscript.*

### Article Information

DOI: 10.9734/AJOPACS/2022/v10i3183

### Open Peer Review History:

This journal follows the Advanced Open Peer Review policy. Identity of the Reviewers, Editor(s) and additional Reviewers, peer review comments, different versions of the manuscript, comments of the editors, etc are available here: <https://www.sdiarticle5.com/review-history/86366>

Original Research Article

Received 22 March 2022  
Accepted 04 May 2022  
Published 08 October 2022

### ABSTRACT

Every radio frequency (RF) design, after its implantation, should be regularly evaluated. The kernel of this article is to evaluate the performance of four GSM networks, taking its received signal quality (RxQual) into consideration. A total of 10501, 10140, 10415 and 10690 RxQual measurements were obtained for MTN, 9mobile, Airtel and Globacom network. These generated data were subjected to statistical analysis in the form of bar charts, quality plots and calculations of measures of central tendency and dispersion. Result shows that 78.43%, 92.18%, 90.68% and 86.93% of the drive test route for MTN, 9mobile, Airtel and Globacom network had good signal quality and met with the Nigerian telecommunication regulatory benchmark of at least 4dB for RxQual. It is therefore deduced that in terms of RxQual, 9mobile was the best GSM network, followed by Airtel network, Globacom network and then MTN network. The result provided in this article will help mobile network operators to improve signal quality, ensure improved network coverage and increase network capacity in the future.

**Keywords:** Interference; received signal quality; GSM network; wireless networks; bit error rate.

\*Corresponding author: E-mail: [ukoettejeremiah@crutech.edu.ng](mailto:ukoettejeremiah@crutech.edu.ng);

## 1. INTRODUCTION

Cellular networks are regulated in Nigeria by the Nigerian Communication Commission (NCC) and their performance is judged using specific telecommunication key performance indicators (KPIs) which are segmented into categories; service integrity, service accessibility, service retainability, service mobility and service reliability [1-4]. One KPI investigated under service reliability in a cellular network is the received signal quality (RxQual).

RxQual is the measure of the signal quality in a GSM network during a call. It is a parameter which measures the amount of bit errors received by the MS that did not pass error checking [5]. The MS determines the bit error rate of the signal and reports it back to the network. It is the average received signal quality of the serving cell measured on all time slot and subset of time slots, measured on basis of bit error rate (BER) before channel decoding [3][6]. These bits may have been garbled along the RF path or lost due to fading or interference.

It is given by a GSM scale of 0 to 7, where 0 is the best quality and 7 is the worst [7]. The higher the value of the RxQual, the worse the communication services [6]. It is used to identify the quality of a voice call or data session and are logarithmically mapped to the BER percentage as shown in the Table 1 [7].

The quality of a radio network is dependent on its coverage, capacity and frequency allocation. Most of the severe problems of RxQual in a radio network can be attributed to signal interference. For uplink quality, bit error rate (BER) statistics is used and for downlink quality, frame error rate (FER) statistics is used. The problems may be caused by flaws in the frequency plan, configuration plans (e.g antenna tilts) and inaccurate correction factors used in propagation models [8]. Other causes are low received signal

level, handover failure, assignment failure ratio and hardware problems [9].

When the RxQual is distorted in a network, the source has to be traced. The entire frequency plan is scrutinized to detect if the source is internal or external. This is done by defining proper neighbours, checking discontinuous reception (DRX) power and connectors, checking broadcast control channel (BCCH) and mobile allocation index offset (MAIO) frequency, reducing the height of the antenna, orientation and tilt, checking the neighbouring list and definition, checking the neighbouring parameters, checking DRX, checking the voltage standing wave ratio (VSWR) and RF cable connectivity, checking DRX hardware [9], checking the transmitter-receiver distance and frequency reuse [10].

Researchers, in the world over, have investigated cellular network Quality of Service in various locations [11-22] but only a few is been centred on RxQual [23-30]. The authors in [30] evaluated the quality of signal of UMTS radio access technology of three cellular networks (MTN, 9mobile and Airtel network) over two cities in Nigeria. A total of 10958, 11075 and 11109 Ec/Io measurements were obtained for MTN, 9mobile and Airtel network. These generated signals were subjected to statistical analysis in the form of bar charts, quality plots and calculations of measures of central tendency and dispersion. Result shows that only 59.64%, 50.45% and 17.02% of the drive test route for Airtel, 9mobile and MTN network had good signal quality and met with the Nigerian telecommunication regulatory benchmark of at least -9dB for Ec/Io. Also, 40.36%, 49.55% and 82.98% of the drive test area for Airtel, 9mobile and MTN network fell below the regulatory benchmark and subscribers in this region experienced dropped calls, blocked calls, handover failures and degraded signal quality due to interference. Airtel network was adjudged the best network while the worst network was MTN network.

**Table 1. RxQual codes with corresponding BER values**

Received Signal Quality codes	Bit Error Rate (BER) in %
0	<0.2%
1	0.2% to 0.4%
2	0.4% to 0.8%
3	0.8% to 1.6%
4	1.6% to 3.2%
5	3.2% to 6.4%
6	6.4% to 12.8%
7	>12.8%

The authors in [31] analyzed WCDMA network in both rural and urban areas of Mwanza, Tanzania. The parameters analyzed were Received Signal Code Power (RSCP), Transmitted Power (TX), Speech Quality Index (SQI) and the ration of received power to noise ( $E_c/N_o$ ). The data collected shows that only 24.02% of the region had good coverage, 23.24% had poor coverage and 52.74% had fair coverage. Also, further analysis of the study area shows that only 27.61% of the region has good QoS, while the poor QoS was recorded in 2.76% of the region.

A well-established real 3G radio network performance evaluation is presented by the authors in [32] on the basis of Receive Signal Code Power (RSCP) and Signal-to-Interference Ratio ( $E_c/I_o$ ). Their focus was to analyze live indoor network performance of 3G network within the confines of Distributed Antenna Systems (DAS). The Tests was carried out by TEMS Investigation, one of the most powerful tools for measuring GSM/3G/LTE mobile wireless network Performance. Practical deployment has proved that Distributed Antenna System is a promising technology for improving indoor coverage and capacity in 3G mobile wireless technology. Installation of DAS in high traffic areas like hotels, malls, railways, public buildings can improve QoS by minimizing call blocking probability and Bit Error Rate (BER). The study shows how DAS can improve both RSCP and  $E_c/I_o$  which are two important key performance indicators in delivering quality 3G services that leads to better user Quality of Experience (QoE).

In this article, a reliability-based performance analysis is carried out using the RxQual as the KPI. Four GSM operators are considered; MTN, 9mobile, Airtel and Globacom network. This research is carried out in two cities in Nigeria through an intensive drive test. The RxQual log files of the four networks are analyzed by a post-processing software and further put through statistical analysis for a comprehension of the collected data. The remaining part of this article

is divided into three parts; first, we shall discuss the method at which this research was carried out, followed by the display and discussion of results and finally go into a conclusion.

## 2. MATERIALS AND METHODS

This study investigates the RxQual of four GSM network operators in Calabar South and Calabar Municipality and to further make comparative analyses, so as to deduce the network with the best received signal quality, based on the NCC benchmark of at least - 4dB. The cellular networks investigated are MTN, Airtel, 9Mobile and Globacom network.

A measurement campaign was carried out through a drive test and RxQual data were collected over base stations in Calabar South and Calabar Municipality. The collected data were analyzed by a post-processing network tool in the form of quality plots using the TEMS discovery software. Furthermore, bar charts and measures of central tendency and dispersion (mean, standard deviations, standard errors of mean, kurtosis and skewness) were calculated for a better description and understanding of the RxQual in the terrain investigated.

## 3. RESULTS AND DISCUSSION

An intensive measurement was conducted to evaluate the performance of four GSM networks transmitting signals over Calabar, based on generated RxQual data during drive test. A total of 10501, 10140, 10415 and 10690 RxQual data were obtained for MTN, 9mobile, Airtel and Globacom network. These generated data were subjected to statistical analysis whose summary is given in Table 2. Fig. 1 to 5 are bar charts comparing the RxQual of the networks at various range and finally, quality plots of the networks based on the drive test route are shown in Figs. 6, 7, 8 and 9 for MTN, 9mobile, Airtel and Globacom network.

**Table 2. Summary of Measures of Central Tendency and Dispersion**

Mobile Networks	MTN	Globacom	9Mobile	Airtel
Mean (dB)	1.49	0.96	0.59	0.72
Minimum (dB)	0	0	0	0
Maximum (dB)	7	7	7	7
Kurtosis	-0.07	1.92	6.58	4.14
Skewness	1.19	1.80	2.75	2.29
Population Std. dev (dB)	2.19	1.80	1.53	1.60
Std. error of mean	0.02	0.02	0.02	0.02

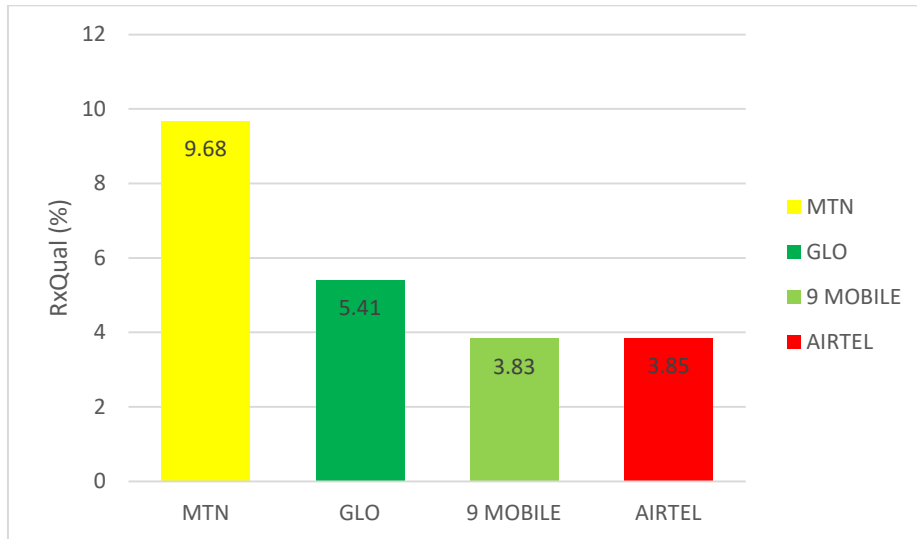


Fig. 1. Percentage of RxQual at 6dB to 7dB for the networks under study

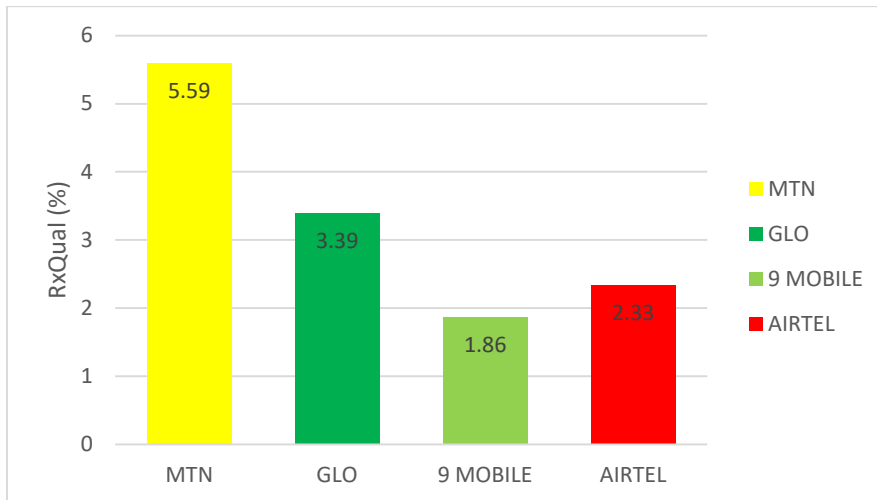


Fig. 2. Percentage of RxQual at 5dB to 6dB for the networks under study

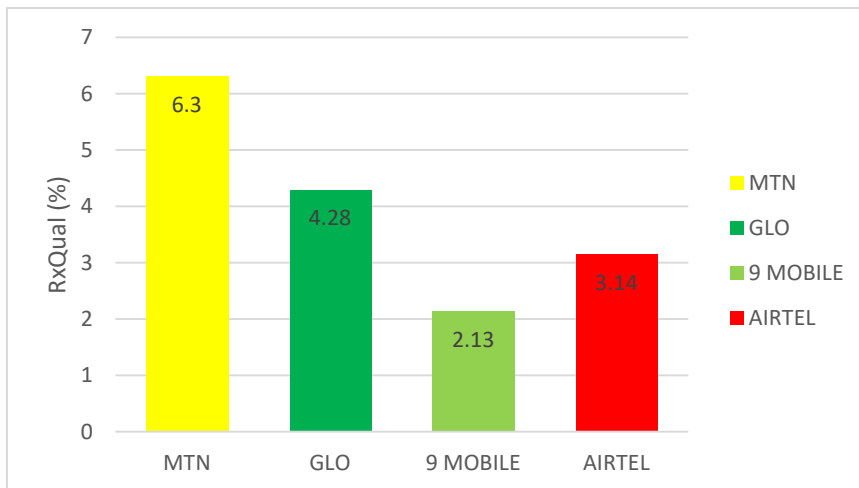


Fig. 3. Percentage of RxQual at 4dB to 5dB for the networks under study

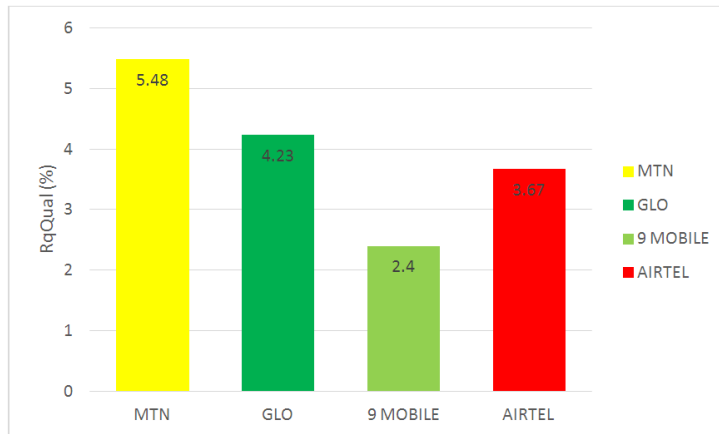


Fig. 4. Percentage of RxQual at 3dB to 4dB for the networks under study

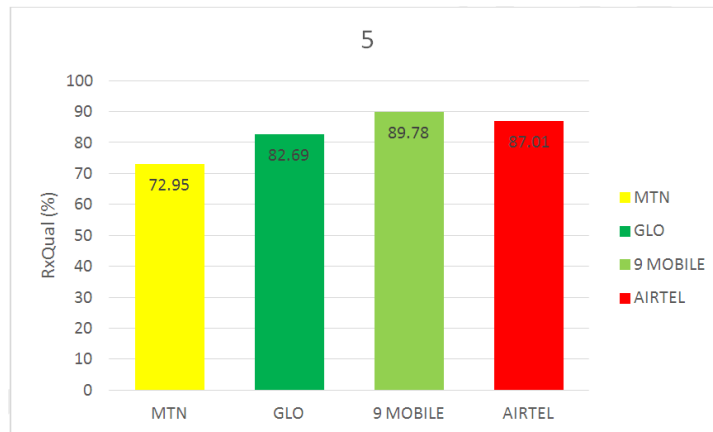


Fig. 5. Percentage of RxQual at 0dB to 3dB for the networks under study

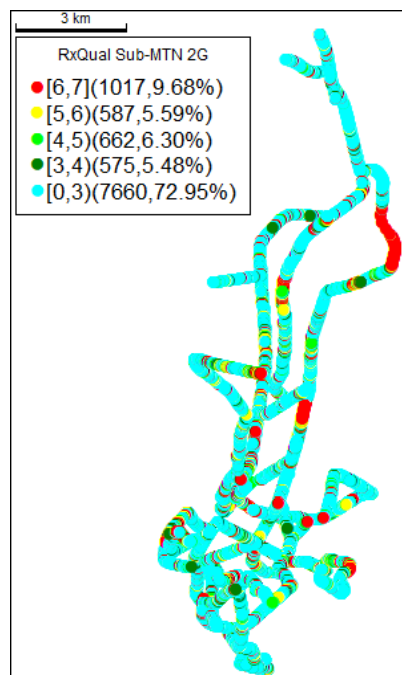


Fig. 6. Quality plots of RxQual for MTN Network

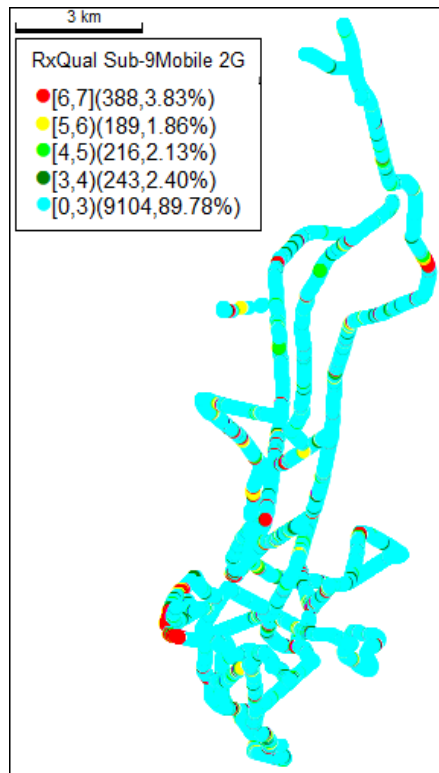


Fig. 7. Quality plots of RxQual for 9mobile Network

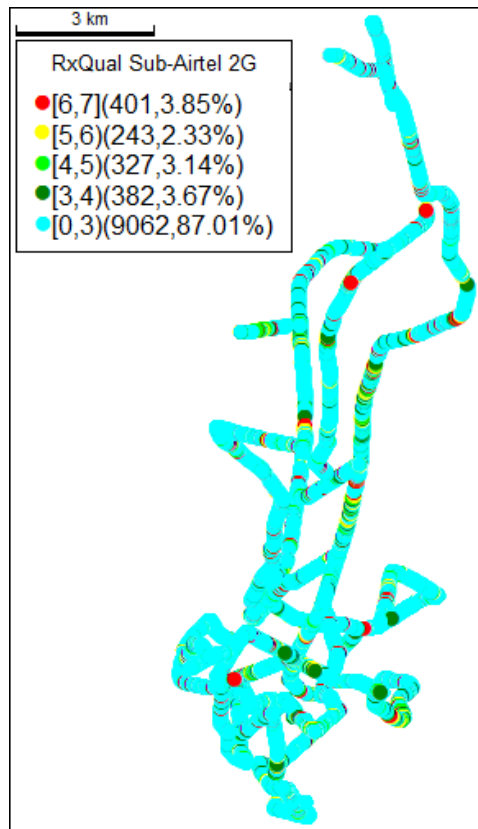
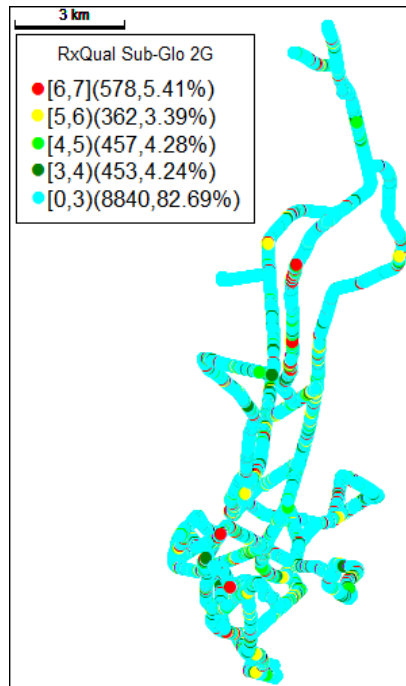


Fig. 8. Quality plots of RxQual for Airtel Network



**Fig. 9. Quality plots of RxQual for Globacom Network**

To estimate the efficiency, accuracy and consistency of the measured data, standard error of the collected data were calculated. A low value of 0.02 was obtained for the four networks, showing that the data used in this study were precise and not forged.

To consider the shape of the distribution, the kurtosis and skewness of the distribution was calculated. MTN, 9mobile, Airtel and Globacom network were seen to have excess kurtosis of -0.07, 6.58, 4.14 and 1.92. This shows that the data distribution in MTN network was slightly platykurtic, the distribution for 9mobile and Airtel network were heavily leptokurtic while that of Globacom network was moderately leptokurtic. Again, MTN, 9mobile, Airtel and Globacom network had skewness values of 1.19, 2.75, 2.29 and 1.80. This means that the data distribution for the four networks were highly skewed.

To check for the spread of data, the mean and the standard deviation of each distribution was calculated. Mean values of 1.49dB, 0.59dB, 0.72dB and 0.96dB were obtained for MTN, 9mobile, Airtel and Globacom network as shown in Table 2. Result from the computed standard deviation shows that for MTN network, 68% of the measured data were within the range of 0dB to 4dB, 95% were within the range of 0dB to 6dB while 99.7% were within the range of 0dB to 7dB.

For 9mobile network, 68% of the measured data were within the range of 0dB to 2dB, 95% were within the range of 0dB to 4dB while 99.7% were within the range of 0dB to 5dB. For Airtel network, 68% of the measured data were within the range of 0dB to 2dB, 95% were within the range of 0dB to 4dB while 99.7% were within the range of 0dB to 6dB. Lastly, for Globacom network, 68% of the measured data were within the range of 0dB to 3dB, 95% were within the range of 0dB to 5dB while 99.7% were within the range of 0dB to 6dB.

Fig. 1 gives a picture of data values within the range of 6dB to 7dB for the four networks. 9.68%, 3.83%, 3.85% and 5.41% of the measured data were within this category for MTN, 9mobile, Airtel and Globacom network. This means that only 1017, 388, 401 and 578 samples in the 10501, 10140, 10415 and 10690 distributions were in this category. This region is denoted by a red colour and the subscribers are very dissatisfied as a result of very high interference due to poor signal quality.

Fig. 2 gives a bar chart of data values within the range of 5dB to 6dB for the four networks. 5.59%, 1.86%, 2.33% and 3.39% of the measured data were within this category for MTN, 9mobile, Airtel and Globacom network. This means that only 587, 189, 243 and 362 samples in the 10501, 10140, 10415 and 10690 distributions were in

this category. This region is denoted by a yellow colour and the subscribers are dissatisfied as it is characterized by poor coverage and interference.

Fig. 3 gives a bar chart of data values within the range of 4dB to 5dB for the four networks. 6.30%, 2.13%, 3.14% and 4.28% of the measured data were within this category for MTN, 9mobile, Airtel and Globacom network. This means that only 662, 216, 327 and 457 samples in the 10501, 10140, 10415 and 10690 distributions were in this category. This region is denoted by a light green colour and subscribers are dissatisfied as it is characterized by fair coverage with moderate interference.

Fig. 4 gives a bar chart of data values within the range of 3dB to 4dB for the four networks. 5.48%, 2.40%, 3.67% and 4.24% of the measured data were within this category for MTN, 9mobile, Airtel and Globacom network. This means that only 575, 243, 382 and 453 samples in the 10501, 10140, 10415 and 10690 distributions were in this category. This region is denoted in dark green. The subscribers are very satisfied since the signal quality is very good.

Fig. 5 gives a bar chart of data values within the range of 0dB to 3dB for the four networks. 72.95%, 89.78%, 87.01% and 82.69% of the measured data were within this category for MTN, 9mobile, Airtel and Globacom network. This means that only 7660, 9104, 9062 and 8840 samples in the 10501, 10140, 10415 and 10690 distributions were in this category. In this region, network quality was excellent and the subscribers were remarkably satisfied.

#### 4. CONCLUSION

A performance evaluation of GSM networks in Calabar South and Calabar Municipality has been conducted, taking the RxQual as the key performance indicator in consideration. The four networks had satisfactory RxQual, with 9mobile network being the best, followed by Airtel network, then Globacom and finally MTN network. However, a few spots in the area under study had poor coverage and this was characterized by several blocked calls, failed handovers, slow data services and dropped calls. The areas with poor quality of service were mainly due to the introduction of bit errors which introduces interference in GSM networks. The network operators are advised to optimize their networks frequently to enhance the Quality of Service (QoS) the render to subscribers.

#### DISCLAIMER

The products used for this research are commonly and predominantly use products in our area of research and country. There is absolutely no conflict of interest between the authors and producers of the products because we do not intend to use these products as an avenue for any litigation but for the advancement of knowledge. Also, the research was not funded by the producing company rather it was funded by personal efforts of the authors.

#### COMPETING INTERESTS

Authors have declared that no competing interests exist.

#### REFERENCES

1. Akanbasiam JA, Ngala DK. The study of quality of service on a major network operator in Ghana. *IOSR Journal of Electronics and Communication Engineering*. 2017;12(4):21-25.
2. Abdulkareem HA, Tekanyi AMS, Adamu H, Abdu-Aguye UF, Almustapha MD, Abdullahi ZM, Kassim AY, Muhammad ZZ, Musa IK. Evaluation of a GSM network quality of service using handover success rate as performance matrices. *Zaria Journal of Electrical Engineering Technology*. 2020;9(2):63-72.
3. Galadanci GSM, Abdullahi SB. Performance analysis of GSM networks in Kano metropolis of Nigeria. *American Journal of Engineering Research*. 2018; 7(5):69-79.
4. Ekah UJ, Iloke J. Performance Evaluation of Key Performance Indicators for UMTS Networks in Calabar, Nigeria. *GSC Advanced Research and Reviews*. 2022;10(1):47-52.
5. Ajayi OT, Onidare SO, Ayeni AA, Adebawale QR, Yusuf SO, Ogundele A. Performance Evaluation of GSM and WCDMA Networks: A Case Study of the University of Ilorin. *International Journal on Electrical Engineering and Informatics*. 2021;13(1):87-106.
6. Yuwono T, Ferdianto F. RF Measurement and Analysis of 2G GSM Network Performance Case Study: Yogyakarta Indonesia. 2015 IEEE 3rd International Conference on Smart Instrumentation, Measurement and Applications (ICSIMA). 2015;1-5.



7. Mkheimer B, Jamoos A. Evaluation and optimisation of GSM network in Jenien City, Palestine. *International Journal of Mobile Network Design and Innovation*. 2012;4(4):201-213.
8. Sireesha BV, Varadarajan S, Vivek, Naresh. Increasing of Call Success Rate in GSM Service Area using RF Optimization. *International Journal of Engineering Research and Applications*. 2011;1(4): 1479-1485.
9. Kumar VSP, Anuradha B, Vivek, Naresh. Improvement of Key Performance Indicators and QoS Evaluation in Operational GSM Network. *International Journal of Engineering Research and Applications*. 2011;1(3):411-417.
10. Lan L, Gou X, Mao J, Ke W. GSM co-channel and adjacent channel interference analysis and optimization. *Tsinghua Science and Technology*. 2011;16(6):583-588.
11. Ettah E, Ushie P, Ekah U, Eze B. The Spatio-Temporal Distribution of Noise Island within the Campus of Cross River University of Technology, Calabar, Nigeria. *Journal of Scientific and Engineering Research*. 2021;8(6):1-7.
12. Emeruwa C, Ekah UJ. Improved Algorithm of Equation Error Model of Active Noise Control. *Journal of Multidisciplinary Engineering Science and Technology*. 2022;9(1):15067-15072.
13. Ekah UJ, Onuu MU. Tropospheric Influence on Call Setup in Mobile Networks. *Journal of Engineering Research and Reports*. 2022;22(2):14-26.
14. Ekah BJ, Iloke J, Ekah UJ. Tropospheric Influence on Dropped Calls. *Global Journal of Engineering and Technology Advances*. 2022;10(2):83-93.
15. Obi E, Ekah U, Ewona I. Real-time assessment of cellular network signal strengths in Calabar. *International Journal of Engineering Sciences & Research Technology*. 2021;10(7): 47-57.
16. Emeruwa C, Ekah UJ. Pathloss model evaluation for long term evolution in Owerri. *International Journal of Innovative Science and Research Technology*. 2018;3(11):491-496.
17. Emeruwa C, Ekah UJ. Investigation of the variability of signal strength of wireless services in Umuahia, Eastern Nigeria. *IOSR Journal of applied physics*. 2018;10(3):1-17.
18. Ekah UJ, Emeruwa C. Guaging of key performance indicators for 2G mobile networks in Calabar, Nigeria. *World Journal of Advanced Research and Reviews*. 2021;12(2):157-163.
19. Ekah UJ, Adeniran AO, Shogo OE. Spatial Distribution of Frequency Modulated Signals in Uyo, Nigeria. *World Journal of Advanced Engineering Technology and Sciences*. 2022;5(1):39-46.
20. Ewona I, Ekah U. Influence of Tropospheric Variables on Signal Strengths of Mobile Networks in Calabar, Nigeria. *Journal of Scientific and Engineering Research*. 2021;8(9):137-145.
21. Iloke J, Utoda R, Ekah U. Evaluation of Radio Wave Propagation through Foliage in Parts of Calabar, Nigeria. *International Journal of Scientific & Engineering Research*. 2018;9(11):244-249.
22. Ekah UJ, Emeruwa C. A comparative assessment of GSM and UMTS Networks. *World Journal of Advanced Research and Reviews*. 2022;13(1):187-196.
23. Ajayi OT, Onidare SO, Tiamiyu OA, Ayeni AA. Interference Mitigation and Control Mechanisms in Cellular Networks. *An International Journal of Biological and Physical Sciences*. 2019;24:1-12.
24. Gilev IV, Kanavin SV. Modeling the destructive effect of interference on mobile networks, using the 3G standard as an example, using a noise generator. 1st international conference on control systems, mathematical modelling, automation and energy efficiency (SUMMA). 2019:407-410.
25. Sulttan EM, Nafea HB, Zaki FW. Interference Management for 5G cellular network constructions. *Wireless Personal Communications*. 2021;116(3): 2465-2484.
26. Ye J, Dang S, Shihada B, Alouini M. Modeling co-channel interference in the THz band. *IEEE Transactions on Vehicular Technology*. 2021;70(7): 6319-6334.
27. Hashima S, Shalaby H, Elnoubi S, Alghoniemy M, Muta O, Furukawa H. Performance Analysis of uplink Fractional Frequency Reuse using worst case Signal to Interference Ratio. *Science and Information Conference*. 2013;839-844.
28. Hu H, Liu Y, Ge Y, Wei N, Xiong K. Multi-Cell Uplink Interference Management: A Distributed Power Control Method. *ZTE Communications*. 2022;20(S1):56-63.
29. Bakare BI, Abayeh OJ, Orike S. Application of Frequency Reuse Technique

- for the Management of Interference in Cellular Network in Port Harcourt. American Journal of Engineering Research. 2022;11(1):16-24.
30. Ekah UJ, Iloke J, Obi E, Ewona I. Measurement and Performance Analysis of Signal-to-Interference Ratio in Wireless Networks. Asian Journal of Advanced Research and Reports. 2022; 16(3): 22-31.
31. Kasegenya A, Sam A. Analysis of Quality of Service for WCDMA Network in Mwanza, Tanzania. Journal of Information Engineering and Applications. 2015; 5(9):18-26.
32. Alhassan H, Abdulhamid R, Danbatta UG, Digwu C, Abdullah A, Al-Sadoon MAG, Ngala MJ. Improvement of Indoor Receive Signal Code Power (RSCP) and Signal-to-Interference Ratio ( $E_c/I_o$ ) and QoS Evaluation in Operational 3G Network using Distributed Antenna System (DAS). International Conference on Broadband Communications, Networks and systems. 2019;263:466-472.

---

© 2022 Iloke et al.; This is an Open Access article distributed under the terms of the Creative Commons Attribution License (<http://creativecommons.org/licenses/by/4.0>), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

*Peer-review history:*

*The peer review history for this paper can be accessed here:*  
<https://www.sdiarticle5.com/review-history/86366>