



Assessment of Maize Crop Evapotranspiration Using Eddy Covariance Flux Tower Weather Data

Charan Babu A. ^{a++*}, T. L. Neelima ^{b#}, K. Avil Kumar ^{bt}
and Chandrasekar K. ^{ct}

^a Department of Agronomy, College of Agriculture, Rajendranagar, India.

^b Water Technology Centre, Professor Jayashankar Telangana State Agricultural University, Rajendranagar, Hyderabad-030, Telangana, India.

^c Water Resources Group, Remote Sensing Applications Area, National Remote Sensing Centre, Balanagar, Hyderabad-037, Telangana, India.

Authors' contributions

This work was carried out in collaboration among all authors. All authors read and approved the final manuscript.

Article Information

DOI: 10.9734/IJECC/2023/v13i102884

Open Peer Review History:

This journal follows the Advanced Open Peer Review policy. Identity of the Reviewers, Editor(s) and additional Reviewers, peer review comments, different versions of the manuscript, comments of the editors, etc are available here: <https://www.sdiarticle5.com/review-history/104859>

Original Research Article

Received: 15/06/2023

Accepted: 20/08/2023

Published: 05/09/2023

ABSTRACT

The study conducted at the Maize Research Centre, Agriculture Research Institute, Professor Jayashankar Telangana State Agricultural University (PJTSAU), Rajendranagar, Hyderabad, from November, 2022 to March, 2023 aimed to compute the crop evapotranspiration (ET_c) of maize crop under two different irrigation treatments using the weather data generated from the Eddy Covariance (EC) flux tower. The two treatments comprise of scheduling irrigation at certain Depletion of Available Soil Moisture (DASM) viz., T1: 20% DASM and T2: 40% DASM. The maize

⁺⁺ M. Sc. (Agronomy);

[#] Sr. Scientist (Agronomy);

[†] Director;

[‡] S/E 'G' & Head (WRP&DD);

*Corresponding author: E-mail: charanbabu4927@gmail.com;

crop was sown and cultivated as per the recommended practices. The bio-physical parameters like plant height and LAI were recorded at 15 days interval. These parameters were statistically analysed by two sample T-test with equal variance. The plant height increased from 35 to 198 cm in 20% DASM and 36 to 180 cm in 40% DASM during the crop growth period (30 to 100 DAS). Similarly, LAI increased from 0.72 to 3.9 and 0.77 to 3.2 in 20 and 40 % DASM treatments till 90 DAS, respectively and later on decreased till harvest. The findings emphasize a positive influence of optimum moisture availability in the root zone on plant growth parameters. The amount of irrigation given was measured to compute ET_c using Soil Water Balance (SWB) method and the crop parameters like plant height, LAI, stomatal resistance values etc., were used for computing the Penman-Monteith equation using the weather parameters generated from the EC flux tower. Seasonal ET_c estimated from the Soil Water Balance (SWB) method (340 & 280 mm) and FAO Penman-Monteith method (350 & 295 mm) in 20 and 40% DASM treatments showed a deviation of +10 and +15 mm, respectively. Furthermore, the study concludes that FAO Penman-Monteith method can accurately estimate ET by using EC flux tower measured weather data, with minor deviations from the SWB method.

Keywords: *Evapotranspiration; maize; eddy covariance; irrigation and DASM.*

1. INTRODUCTION

Maize is one of the most preferred and widely cultivated crops and has a great ability to adapt to various climate and soil environments [1]. It is the third most important cereal crop after rice and wheat, accounting for 10.8% (359.13 lakh tonnes) food grain production in India [2]. Globally, India ranks 4th and 6th in terms of acreage (3.96%) and production (2.13%) respectively, with 3.07 t/ha of productivity during 2021 [3]. It serves as a staple food and animal feed as well as a fundamental raw material for several industrial applications [4]. According to a report [3], maize growth rate is projected to be 1.34% CAGR (Compound Annual Growth Rate), while the consumption rate would be slightly higher with 1.82 % CAGR during 2021-31. Furthermore, its demand as an animal feed will go up to 54% from 51% by 2031. On the other hand, ever increasing population, over exploitation of ground water resources and climate changing scenario have increased the demand for fresh water resources in the country. Against this backdrop, adopting proper agronomic practices such as scheduling irrigation is essential as it may influence the plant physiological traits and yield [5]. Wise use of water with correct scheduling of irrigation is important in producing maximum yields [6]. In this context, deficit irrigation may be an option to meet the partial crop water requirements by adopting various physiological mechanisms to enhance water use efficiency, viz., reducing transpiration rates, altering root growth patterns and closing stomata during peak heat periods. Consequently, plants can efficiently draw moisture from the soil [7].

In agricultural water management, understanding and accurate estimation of evapotranspiration (ET), which is the combination of evaporation from the soil surface or water surface and transpiration from the vegetation [8] is crucial, as it plays a major role in the crop water requirement (CWR) of any crop [9]. However, estimating ET accurately remains a challenging task since, it is a complex process involving soil, water, land and vegetation. Several methods have been developed for ET estimation including simple Soil Water Balance method (SWB), Pan evaporation method, empirical methods (Penman-Monteith, Priestly-Taylor, Hargreaves-Samani, Thornthwaite, Blaney-Criddle), field-based measurements (Lysimeter, Bowen Ratio Energy Balance Systems (BREBS), Scintillometers, Eddy Covariance) and remote sensing models. Each method has their own advantages and limitations. Among all the methods, FAO Penman-Monteith method [10] is widely accepted and adopted by FAO [11].

The objective of this study is to estimate evapotranspiration of maize crop by FAO Penman-Monteith method using weather data measured from eddy covariance flux tower under two different irrigation regimes and to compare these estimates with the traditional Soil Water Balance method and assess plant growth responses to deficit irrigation.

2. MATERIALS AND METHODS

A field experiment was conducted during *rabi*, 2022-23 at Maize Research Centre (MRC), Agriculture Research Institute (ARI), Professor Jayashankar Telangana State Agricultural

University (PJ TSAU), Rajendranagar, Hyderabad. The experimental field is situated within the fetch area (Fig. 1) of Eddy Covariance flux tower, which is established at 17°19'34.15"N latitude and 78°23'44.67"E longitude at an elevation of 541 m above MSL. DHM-117, a medium duration maize hybrid, tolerant to lodging and moisture stress was sown in large plots with two different irrigation regimes i.e., Scheduling irrigation at certain Depletion of Available Soil Moisture (DASM), T1: at 20 % DASM and T2: at 40% DASM. The seeds were sown at a spacing of 60 cm x 20 cm on the side of ridges on 10th November, 2022. To maintain optimum plant population, gap filling was done at 15 DAS and thinning was done at 20 DAS. Remaining package of practices were adopted as per the recommendations of PJ TSAU and additionally, various management practices were adopted to reduce runoff and seepage losses. Throughout the crop growth period, growth parameters like Plant height (cm), Leaf Area Index (LAI) were recorded and stomatal conductance (1/r_s) at tasselling stage was recorded with porometer. Gravimetric soil moisture content was estimated before and after the irrigation using equation (1) by recording fresh weight and oven dry weights of soil samples.

$$\text{Moisture content, } \theta_g (\%) = \frac{\text{Fresh weight} - \text{Oven dry weight}}{\text{Oven dry weight}} \times 100 \quad (1)$$

Irrigation was scheduled by adopting ridge and furrow method when available soil moisture is depleted by 20% and 40 % for T1 and T2 treatments, respectively During each irrigation

event, the discharge was measured by calculating the time taken for the pump in the field to fill a container of a known volume (100 L).

Eddy covariance [12] is a widely used micro meteorological technique for measuring ET. It measures the vertical fluxes of water vapor and CO₂ between an ecosystem and the atmosphere. This method relies on the concept of eddies, circular air motions caused by temperature differences, possessing attributes such as mass, density, volume and velocity in three dimensions (3D). By utilizing an IRGASON sensor, which is a combination of a 3D sonic anemometer and infrared gas analyser, the eddies' characteristics in terms of velocity, density and gas concentration are measured. The statistical covariance of vertical velocity and gas concentration represents the flux of the given entity (water vapor, latent heat, sensible heat, CO₂).

The Eddy covariance flux tower is equipped with various other sensors and instruments, as detailed in the Table 1, which continuously measures the energy balance and weather parameters with fast sampling rate and high precision.

The collected data is processed in data logger and mean values are computed at every 30 min interval. These values were averaged to every day and used as crucial inputs, along with crop parameters like plant height, leaf area index (LAI) and bulk resistance, to be substituted into the FAO Penman-Monteith equation [10] (eq. 2) to obtain daily ET_c.

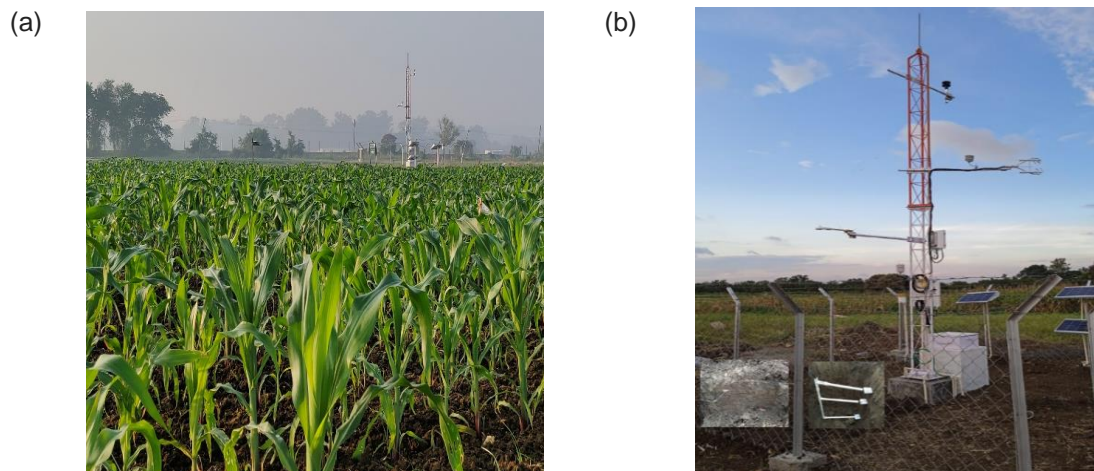


Fig. 1. (a) Maize crop at knee-high stage and (b) EC flux tower at MRC, ARI, PJ TSAU, Hyderabad

Table 1. Components of eddy covariance flux tower

S. No	Sensor/Instrument	Measurements
1	IRGASON sensor	<ul style="list-style-type: none"> Sonic anemometer: 3D wind speed (m/s), sonic temperatures (°C) and wind direction. Infrared gas analyzer: Density and concentration (mmol/mol) of CO₂, H₂O
2	Net radiometer	Net radiation along with incoming shortwave and outgoing longwave radiation (W/m ²)
3	Fine wire Thermocouple, ambient air temperature and Relative humidity sensor	Air temperature (°C) and Relative humidity (%)
4	Soil moisture probes	Soil moisture (%v/v) and temperature (°C) at 15, 35 and 45 cm depth
5	Soil heat flux plates	Soil heat flux (W/m ²) at 10 and 30 cm depth
6	Data logger	Integration of sensors and instruments, real time data recording, storage and transfer
7	Tipping bucket Rain gauge	Quantity (mm) and intensity of rainfall (mm/hr)
8	Solar panel and battery	Power supply

Despite the ability of the EC flux tower to measure ET_a, it provides a mean value for the fetch area. However, due to the existence of two irrigation treatments in the experiment, different ET_c values are possible. To capture these variations in ET_c between the treatments, the FAO Penman-Monteith method was employed for the study.

$$\lambda ET = \frac{\Delta(R_n - G) + \rho_a C_p \frac{(e_s - e_a)}{r_a}}{\Delta + \gamma \left[1 + \frac{r_s}{r_a} \right]} \quad (2)$$

Where,

R_n is net radiation (MJ/m²/day),
 G is soil heat flux (MJ/m²/day),
 ρ_a is atmospheric pressure (kpa),
 C_p is specific heat of air at constant pressure (1.004 x 10⁻³ MJ/kg/°C),
 (e_s-e_a) is vapour pressure deficit (kpa),
 Δ denotes slope of saturation vapour pressure curve vs temperature (kpa/°C),
 γ is psychrometric constant,
 r_a and r_s are the surface and aerodynamic resistances (s/m) respectively,
 λ is latent heat of vaporization (2.45 MJ/kg/°C)
 ET is evapotranspiration (mm/day)

Input parameters used for substitution in FAO Penman-Monteith equation are, weather parameters from EC flux tower such as, windspeed (u₆); height of wind speed (z_m= 6m) and relative humidity (z_h= 6m) measurements; air pressure (p_a); air temperature (T_a); vapour

pressure deficit (e_s-e_a); net radiation (R_n); soil heat flux (G) and field observations includes, plant height (h); LAI; stomatal resistance (r_i). Surface (bulk) resistance (r_s) and aerodynamic resistance (r_a) were solved following the methodology outlined in [10]. The other parameters like crop sowing, emergence of the seedlings, dates of scheduling irrigation the stage of physiological maturity were considered for ET_c computation

LAI and stomatal conductance played crucial roles as inputs in calculating surface resistance, whereas plant height (h), height of wind speed and RH measurements were critical inputs to determine aerodynamic resistance. The seasonal ET_c was calculated by summing the daily ET_c values obtained throughout the crop growth period. Subsequently, this seasonal ET_c was compared with the ET_c obtained by the SWB method for both treatments independently. ET_c by SWB method calculated as below (eq. 3),

$$ET_c = (I + P + \Delta S) - DP \quad (3)$$

Where, ET_c is crop evapotranspiration, I is irrigation water applied (mm), P is precipitation (mm), ΔS is changes in soil water storage in a given time Δt (days) in the root zone, DP is deep percolation losses beyond the root zone (mm)

Crop growth parameters were statistically analysed using two sample t-test with equal variances.

3. RESULTS AND DISCUSSION

3.1 Growth Parameters

3.1.1 Plant height (cm)

Regardless of the treatments, the plant height showed a consistent increase from emergence to physiological maturity during the crop growth period with 21 cm (30 DAS) to 198 cm (110 DAS) in T1 treatment and 21 cm (30 DAS) to 180 cm (110 DAS) in T2 treatment as shown in Fig. 2(a). Notably, the plant height in T1 was relatively higher than in T2, as depicted in the Fig. 2 (a). Statistically significant differences in plant height were observed only during the period of 45-60 DAS. An adequate amount of water applied at plant requirement promotes the plant's physiological parameters while the insufficient application, limits the plant growth. Similar results were reported by Ahirwar et al. [13] and Kiran et al. [14]. An increase in irrigation levels was found to be associated with an increase in plant height, as reported in various studies [15 and 16]. The increase in plant height observed in T1 can be attributed to enhanced moisture absorption and nutrient uptake by the plants [17,18 and 19].

3.1.2 Leaf Area Index (LAI)

In both the treatments LAI exhibited an increase from emergence (8 DAS) to 90 DAS and later on, gradually decreased as depicted in the Fig. 2(b). These findings align with previous studies by Adarsha et al. [20], Bharath et al. [21] and Sharifi et al. [22], which also reported similar trends. LAI observed was 0.73, 3.91, 2.31 in T1 and 0.77, 3.22 and 1.87 in T2 at 30, 90 DAS and at harvest, respectively. T1 had a higher LAI compared to T2 during the crop growth period. Statistically significant differences between the treatments were observed from 60 DAS till harvest.

In T1, adoption of more frequent irrigation has played a crucial role in facilitating higher nutrient mobility and water uptake, which further supports cell division, elongation, turgidity and photosynthetic activity. Consequently, these favourable combinations contributed significantly to higher LAI during 60 DAS to harvest, indicating improved canopy development. In contrast, the plants in T2 might have experienced water stress during their growth period due to limited moisture availability, hindering optimal cell expansion and overall growth. The water stress has negatively impacted plant physiological processes, leading to reduced canopy development and consequently, a lower LAI.

3.1.3 Leaf stomatal resistance (r_l)

At tasselling stage, leaf stomatal conductance was measured using a porometer, revealing no significant difference between the two treatments (T1 and T2). For the initial and final stages, values were adopted from [23] for T1 and T2, corresponding to their respective irrigation conditions and then converted into resistance. The higher leaf stomatal resistance in the 40% DASM treatment may be attributed to its lower relative water content. As a C4 plant, the maize crop might have responded to limited water availability by adjusting their stomatal openings to reduce water loss through transpiration, thereby maintaining turgidity. In contrast, the lower stomatal resistance in the 20% DASM treatment may reflect a more efficient water use strategy, ensuring optimal physiological performance under favourable irrigation conditions.

3.2 Computation of Evapotranspiration

3.2.1 Soil water balance method

A total of 400 mm and 315.9 mm of irrigation water was applied. The deep percolation losses were found to be 60 and 40 mm for T1 and T2 treatments, respectively. T1 received 6 irrigations, while T2 received 5 irrigations during the crop growth period. By neglecting the runoff and seepage losses, evapotranspiration was measured to be 340 mm and 280 mm in T1 and T2 treatments, respectively.

3.2.2 Penman-monteith method

On substitution of plant parameters of given treatment along with weather parameters obtained from eddy covariance flux tower in equation (1), daily ET was obtained. Daily ET ranged from 0.44 to 7.72 mm/day and 0.42 to 6.27 mm/day in T1 and T2 treatments averaging at 2.61 and 2.23 mm/day respectively (Fig. 3). Furthermore, seasonal ET_c of T1 was recorded at 332.5 mm while T2 recorded a lower value of 275.6 mm. [24] reported a ET_c of 351.6 mm for entire growing season of maize crop using pan evaporation method at Hyderabad and similar findings were reported by Narendra et al. [25] at Karnal.

The daily ET_c values consistently showed that T1 had a higher ET_c rate compared to T2, with an average difference of 0.38 mm/day. This discrepancy in daily ET_c was also evident in their

cumulative seasonal ET_c , as T1 recorded 56.9 mm more ET_c than T2 during the entire crop growth period. At the initial stage, both treatments showed similar ET_c rates, as the treatments were not imposed until crop establishment. The peak ET_c occurred between 60-70 DAS in both treatments, with a slight decrease observed as the crops approached maturity.

As T1 received relatively more amount of irrigation water it has shown higher ET_c while, T2 might have adopted physiological changes to reduce transpiration due to the less availability of moisture in root zone and evaporation might also be less as the limited availability of water exerts a controlling influence on soil evaporation [10].

The variation in seasonal ET_c between the treatments can be attributed to variations in LAI, plant height and leaf stomatal resistance between the treatments, which are influenced by the availability of soil moisture.

In the comparison of FAO Penman-Monteith method with the SWB method for T1 and T2 treatments, there was a deviation of -7.5 mm and -4.4 mm (Fig. 4), respectively. These deviations can be partly attributed to the high frequency (10 Hz) measurements obtained from EC flux sensors and instruments. The sensitive nature of these instruments allows them to capture even the minor variations, contributing to the observed differences between the two methods.

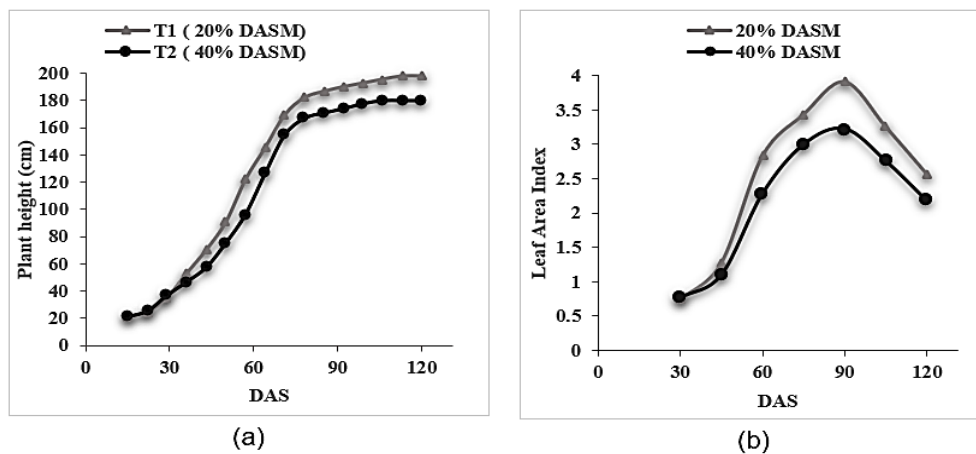


Fig. 2. (a) Plant height and (b) leaf area index of maize crop as influenced by different irrigation treatments during rabi, 2022-23.

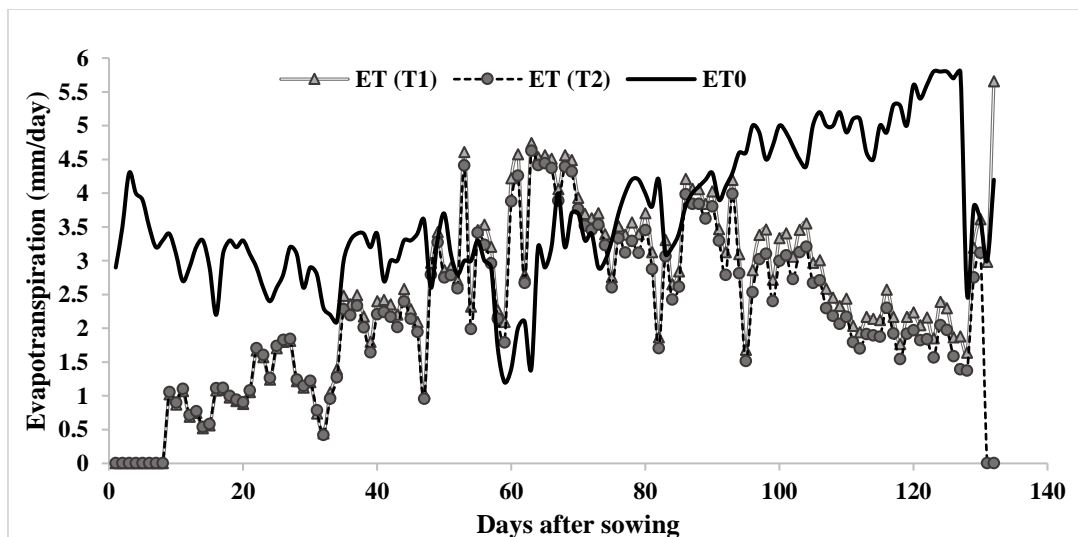


Fig. 3. Daily evapotranspiration of maize crop as influenced by irrigation during rabi, 2022-23

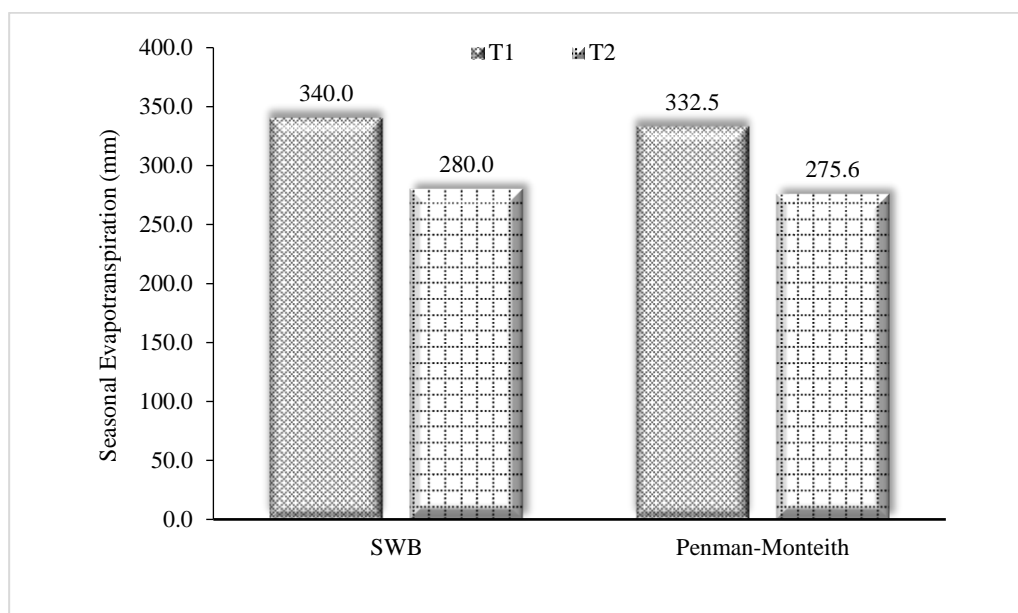


Fig. 4. Seasonal evapotranspiration (mm) of maize crop derived using two different methods

The FAO Penman-Monteith method using eddy covariance flux tower weather data as an input proved valuable in providing reliable ET estimates as it captured the difference in ET_c between two treatments. In terms of plant parameters, LAI, plant height and leaf stomatal resistance played a critical role in estimation of ET_c using the FAO Penman-Monteith equation, as variations in these parameters directly contributed to the observed differences in ET_c between the two treatments.

4. CONCLUSIONS

The FAO Penman-Monteith method has provided precise measurements of evapotranspiration for the maize crop, demonstrating slight discrepancies of -7.5 mm and -4.4 mm under irrigated conditions, with irrigation scheduled at 20% and 40% DASM respectively. In terms of the treatments, the 20% DASM treatment exhibited a remarkable 21% increase in evapotranspiration compared to the 40% DASM treatment. Conspicuously, 10-20% enhancement of plant growth parameters was specifically observed within the 20% DASM regimen.

ACKNOWLEDGEMENT

I express my sincere gratitude to the National Remote Sensing Centre (NRSC), Hyderabad, for their collaboration with Professor Jayashankar Telangana State Agricultural University (PJTSAU) in establishing the EC flux tower under

the National Hydrology Project (NHP). Their support made it possible to conduct this study.

COMPETING INTERESTS

Authors have declared that no competing interests exist.

REFERENCES

- Halli HM, Angadi S, Kumar A, Govindasamy P, Madar R, Baskar VDC, Elansary HO, Tamam N, Abdelbacki AMM, Abdelmohsen SAM. Assessment of planting method and deficit irrigation impacts on physio morphology, grain yield and water use efficiency of maize (*Zea mays* L.) on Vertisols of Semi-Arid Tropics. *Plants*. 2021; 10:1094.
- MoA & FW, GOI. Third advanced estimates of production of food grains for 2022-23. Department of Agriculture and Farmers Welfare, Ministry of Agriculture and Farmers Welfare, Government of India; 2023. Available:<https://desagri.gov.in/wp-content/uploads/2023/05/Time-Series-3-AE-English-2022-23.pdf>
- FICCI; 2023. Available:<https://www.thehindubusinessline.com/economy/agri-business/maize-consumption-growth-to-outpace-production-in-india/article66755631.ece>

4. Akhil G, Singh V, George SG. Evaluation of growth and yield of maize (*Zea mays* L.) hybrids under agro-climatic conditions of Prayagraj, U.P., India. International Journal of Environment and Climate Change. 2023;13(9):907–911.
5. Sangakkara UR, Amarasekera P, Stamp P. Irrigation regimes affect early root development, shoot growth and yields of maize (*Zea mays* L.) in tropical minor seasons. Plant Soil Environment. 2010;56:228–234.
6. Sruthy KT, Arjun TP. Water requirement of major tuber crops: a review. International Journal of Environment and Climate Change. 2023;13(9):1482–1487.
7. Smith M, Kivumbi D, Heng LK. Use of the FAO CROPWAT model in deficit irrigation studies. In Deficit Irrigation Practice; Water Reports No. 22; Food and Agriculture Organisation of the United Nations: Rome, Italy. 2002;17–28.
8. Nolz R. A review on the quantification of soil water balance components as a basis for agricultural water management with a focus on weighing lysimeters and soil water sensors. Journal of Land management, Food and Environment. 2016;67(3):133–144.
9. Guguloth P, Premkumara, Basavareddy, Patil R and Gowdar P. Forecasting potential evapotranspiration using seasonal ARIMA model for Northern Telangana Zone, India. International Journal of Environment and Climate Change. 2022;12(12):363–373.
10. Allen RG, Pereira LS, Raes D, Smith M. Crop evapotranspiration guidelines for computing crop water requirements. Irrigation. Drainage; Paper. No. 56; FAO: Rome, Italy; 1998.
11. Aryalekshmi BN, Biradar RC, Chandrasekar K and Mohammed Ahamed J. Analysis of various surface energy balance models for evapotranspiration estimation using satellite data. The Egyptian Journal of Remote Sensing and Space Sciences. 2021;24(3):1119-1126
12. Baldocchi DD, Meyers TP. Trace gas exchange above the floor of a deciduous forest: 1. Evaporation and CO₂ efflux. Journal of Geophysical Research. 1991; 96(4):7271–7285.
13. Ahirwar S, Subbaiah R, Gupta P, Tiwari MK, Trivedi MM, Vaishnav P. Effect of irrigation regimes and mulching on the crop physiology and yield of rabi maize (*Zea mays*). International Journal of Environment and Climate Change. 2023; 13(9): 1011–1020
14. Kiran YD, Sumathi V, Reddy GP. Growth, yield and water use of maize as influenced by drip irrigation schedules and nitrogen levels. Journal of Research ANGRAU. 2019; 47(4): 1-11
15. Prasad UK, Prasad TN and Kumar A. Effect of irrigation and nitrogen on growth and yield of sunflower (*Helianthus annuus* L.). Indian Journal of Agricultural Sciences. 1999;69:567–569
16. Taha M, Mishra BK, Acharya N. Effect of irrigation and nitrogen on yield and yield attributing characters of sunflower. Annals of Agriculture Research. 2021;22: 182–186.
17. Kadasiddappa M. Drip irrigated maize and sunflower: growth, yield, evapotranspiration and water production functions. Ph.D Thesis submitted to PJTSAU, Hyderabad; 2015
18. Cakir R. Effect of water stress at different development stages on vegetative and reproductive growth of corn. Field Crops Research. 2004;89(1):1-6.
19. Dadgale PR, Chavan DA, Gudade BA, Jadhav SG, Deshmukh VA and Suresh Pal. Productivity and quality of Bt cotton (*Gossypium hirsutum*) as influenced by planting geometry and nitrogen levels under irrigated and rainfed conditions. Indian Journal of Agricultural Sciences. 2014;84(9):1069–1072
20. Adarsha GS, Veeresh H, Narayana Rao K, Ashok Kumar G, Basavanneppa MA. Effect of foliar application of micronutrient mixture on growth and yield of maize (*Zea mays* L.). Karnataka Journal of Agricultural Sciences. 2019; 32(2):162-166
21. Bharath T, Vidyasagar GECh, Rao VP, Reddy SN and Madhavi A. Effect of INM on growth and physiological parameters of maize in maize-groundnut cropping system in Southern Telangana Region. International Journal of Pure and Applied Bioscience. 2017;5(4):418-424
22. Sharifi RS and Pirzad A. International Journal of Agriculture: Research and Review. 2011; 1(1): 26-32.
23. Brewer K, Clulow A, Sibanda M, Gokool S, Odindi J, Mutanga O, Naiken V, Chimonyo VGP, Mabhaudhi T. Estimation of maize foliar temperature and stomatal conductance as indicators of water stress based on optical and thermal imagery

- acquired using an Unmanned Aerial Vehicle (UAV) Platform. *Drones*. 2022; 6:169.
24. Kadasiddappa M, Praveen Rao V, Yella Reddy K and Tirupataih K. Yield, water use and water use efficiency of drip irrigated maize in southern Telangana region of AP. In: Proceedings of NGWC, 2013 on problems, challenges and management of GW in agriculture. Held from 9-11 Dec.2013 at Coimbatore, Tamil Nadu. 2013;372-376.
25. Narendra TK, Dinesh Sharma K, Surendra LK. Determination of evapotranspiration for maize and berseem clover. *Irrigation Science*. 2003;21(4):173-181.

© 2023 Babu et al.; This is an Open Access article distributed under the terms of the Creative Commons Attribution License (<http://creativecommons.org/licenses/by/4.0>), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Peer-review history:

The peer review history for this paper can be accessed here:
<https://www.sdiarticle5.com/review-history/104859>